









2024

Product Catalogue

Intuitive Operation, Dependability, Performance and Value since 1972

Your Adam Equipment Office



Why Adam?



Accuracy and dependability. Suitability for the application. Value for money. Intuitive features to simplify the most complex weighing tasks. These are all metrics within which we define the Adam Equipment product range, for now and for the future.

We are the proud creators of some of the industry's leading weighing scales and balances. In 2023, we showed our confidence in the quality of our products by extending warranties across our range, to as much as five years for most models.

For 2024, we've refreshed our lineup with several new product ranges. These additions perfectly demonstrate our continued commitment to providing the weighing solutions our customers need, with each new product based on feedback from the very people who use Adam scales and balances every day.

With more than 50 years of weighing experience, Adam continues its commitment to weighing excellence for our customers and our dealer network.

For questions or quotes:



+61 (0) 8 6461 6236



sales@adamequipment.com.au



orders@adamequipment.com.au

Find it online!



Click the QR code on any product page to find more information on that model.

Stay connected through social media



Facebook

facebook.com/adamequipment



LinkedIn:

linkedin.com/company/adam-equipment



YouTube

youtube.com/user/adamequipment



X (Twitter): x.com/adamequipment



Visit the desktop site at adamequipment.asia

Icon Guide



Backlit Display

The Liquid Crystal Display (LCD) of some balances is lit from behind to facilitate easy reading of weighing results. This is especially useful when weighing takes place in areas where lighting is low, or where weight readings may be viewed from a distance.



Tare Function

The tare function allows the weight of a container or packaging to be removed from the reading of a scale or balance. For example, if an item is weighed in a box, the tare function can be used to remove the weight of the box from the display. As a result, only the weight of the item inside the box will show on the scale's display.



Multiple Weighing Units

The weighing units used will depend on the preference of the user, the application or the industry; however, having the option to change the weighing units displayed makes a scale or balance far more useful. Some applications and industries will require specific units, such as carats (ct) for jewellery weighing, and g/kg for trade applications.



Weigh-Below Hook

Weigh-below hooks allow suspended weighing. A number of Adam scales and balances are provided with, or can be used with, a weigh-below hook; typical applications include density determination (for which a density determination kit should also be considered) and specific gravity testing.



Security Bracket

To help prevent theft, security bracket allows an Adam balance to be secured with a security lock and cable. Security locks and cables are most commonly used in education environments where expensive equipment (such as an analytical balance) may be used by many students on a daily basis.



RS-232 Port

An RS-232 port is a commonly used output when sending data to a printer or PC. Sending information directly from the scale or balance to a computer means immediate, automated traceability and helps to speed up weighing and recording processes, as well as eliminating the risk of a transcription error. Alternatively, look for models with USB output.



USB Port

Two types of USB output can be found on Adam scales and balances: those that can be used to send weight data to a PC (as with an RS-232 output) and outputs that allow data to be transferred to a USB stick. In laboratory environments, USB and RS-232 outputs help ensure compliance with GLP/ISO guidelines.



IP67 & IP68 Waterproof Rated

IP stands for Ingress Protection, and the number corresponds with a specific level of protection from ingress of water and dust. Adam's IP66 and IP67 models are regarded as 'washdown,' and IP68 models, being a higher number, are 'waterproof.' Specifically, IP68 models, according to the official definition, can be 'submerged in water deeper than 1 metre.'



Internal Calibration

Regular calibration of scales and balances is essential to ensure accuracy of weight readings. Adam balances with internal calibration help maintain accuracy without having to check using external weights. This is easier, more convenient and means no time spent on manual calibration.



External Calibration

Scales and balances with external calibration require periodic manual calibration checks, using calibration weights. External calibration is standard with most scales and balances, and we recommend devices are checked at least once a year, depending on frequency of use. Calibration weights can be found on page 73.



Rechargeable Battery

Choose a scale or balance with a rechargeable battery if you require flexibility, portability and want to avoid the regular purchasing of batteries. Adam models with a rechargeable battery typically offer 100-120 hours of use between full charges.



attery Power

If a scale or balance is likely to be used in multiple locations or in locations where there is no mains power available, choose battery power. Adam scales and balances that use batteries are typically compact and portable, making it even easier to move them to locations where they're needed.



Built-in Printer

A printer allows weight information to be recorded in hard copy. Scales with built-in printers allow labels to be printed immediately after weighing, with information such as weight, date, time, barcode and company name. The labels can then be attached to the weighed goods or container.



Date

Having date information available is essential when weight data is recorded. In line with GLP/GMP/ISO guidelines, date (and time) improves traceability and ensures information recorded is more complete.



Time

As with Date (see above), Adam scales and balances that provide time information are required if you're printing or recording weight data for traceability and compliance with GLP/GMP/ISO guidelines.



GLP/GMP/ISO Printouts

GLP (Good Laboratory Practice) and GMP (Good Manufacturing Practice) are quality assurance systems, and their guidelines state how traceable information should be recorded. Weighing scales with this icon facilitate these processes by providing information such as the time, the date, the balance or scale's ID, and other useful data that can be tracked and monitored.



Freight Shipping Only

Products with this icon are eligible for freight shipping only due to the size and weight of the product.

Full product information on our **NEW** website

Adam's new website makes it even easier to find the information you need.



Warranty Information

Need to know the finer details of our longer, industry-leading warranties, or how a product can be registered? It's all here.



Click for product support

Repairs & Replacement Parts

Our new website lists all replacement parts, plus you can directly contact Adam Tech support. There's troubleshooting help, too!



Drivers & Software

Download the latest drivers and software for an Adam scale or balance, such as label-making software for our BKT/BCT scales.



Download documents for any Adam scale or balance to aid operation, or for more advanced model-specific information.

Approvals



NSF International is a product testing, inspection and certification organisation created to standardise sanitation and food safety requirements globally. NSF develops standards for industries including food & beverage, home appliances and water, as well as performs analytical testing for supplements and pharmaceuticals. Learn more at www.nsf.org/gb/en



EC Type Approval

Approval is required for selling goods by weight and in other specified weighing applications in Europe. EC Type Approval can be granted for most types of Non-Automatic Weighing Instruments (NAWI), after the correct testing procedure is performed by an approved body. A test report and certificate are issued to the manufacturer or importer of the product that has undergone the type approval test. Need approved scales? Look out for the logo in this catalogue.

Warranty



We trust the quality and construction of our products. To demonstrate that trust, we've increased the warranties on nearly all our scales and balances by up to five years. The new warranty periods come at no extra cost and mean customers are getting greater value and peace of mind for their money.



Click the QR code to find out more or visit...

adamequipment.asia/warranty

























NEW!

Find Adam's **NEW** GK-Plus Checkweighing Indicators on page 66



Capacity Selection Guide

Looking for a weighing scale or balance with a specific capacity?

Use this guide to find Adam models by capacity, from 50g to 10 tonnes.

Model	Capacity	Readability	Page
PMB 53	50g	0.001g / 0.01%	25
EAB 125i	62g / 120g	0.01mg / 0.1mg	8-9
SAB 125i	62g / 120g	0.01mg / 0.1mg	10-11
EAB 124e	120g	0.0001g	8-9
EAB 124i	120g	0.0001g	8-9
SAB 124e	120g	0.0001g	10-11
SAB 124i	120g	0.0001g	10-11
LAB 124e	120g	0.0001g	12-13
LAB 124i	120g	0.0001g	12-13
HCB 123	120g	0.001g	18-19
HCB 153	150g	0.005g	18-19
PMB 163	160g	0.001g / 0.01%	25
PMB 202	200g	0.01g / 0.05%	25
CQT 202	200g	0.01g	17
DCT 201	200g	0.1g	22
LAB 214e	210g	0.0001g	12-13
LAB 214i	210g	0.0001g	12-13
EAB 225i	82g / 220g	0.01mg / 0.1mg	8-9
SAB 225i	82g / 220g	0.01mg / 0.1mg	10-11
EAB 224e	220g	0.0001g	8-9
EAB 224i	220g	0.0001g	8-9
SAB 224e	220g	0.0001g	10-11
SAB 224i	220g	0.0001g	10-11
LPB 223e	220g	0.001g	12-13
LPB 223i	220g	0.001g	12-13
LAB 254e	250g	0.0001g	12-13
LAB 254i	250g	0.0001g	12-13
CQT 251	250g	0.1g	17
HCB 302	300g	0.01g	18-19
DCT 302	300g	0.01g	22
EAB 314e	310g	0.0001g	8-9
EAB 314i	310g	0.0001g	8-9
SAB 314e	310g	0.0001g	10-11
SAB 314i	310g	0.0001g	10-11
EPB 363e	360g	0.001g	8-9
EPB 363i	360g	0.001g	8-9
SPB 363e	360g	0.001g	10-11
SPB 363i	360g	0.001g	10-11
EAB 414i	410g	0.0001g	8-9
LPB 423e	420g	0.001g	12-13
LPB 423i	420g	0.001g	12-13
CB 501	500g	0.1g	21
SAB 514i	510g	0.0001g	10-11
HCB 602H	600g	0.01g	18-19
HCB 602M	600g	d=0.01g e=0.1g	18-19
HCB 602	600g	0.02g	18-19
CQT 601	600g	0.1g	17

Model	Capacity	Readability	Page
DCT 601	Capacity 600g		
LPB 623e	620g	0.1g	22 12-13
		0.001g	
LPB 623i EPB 723e	620g 720g	0.001g	12-13 8-9
		0.001g	
EPB 723i	720g	0.001g	8-9
SPB 723e	720g	0.001g	10-11
SPB 723i	720g	0.001g	10-11
LPB 823e	820g	0.001g	12-13
LPB 823i	820g	0.001g	12-13
HCB 1002M	1000g	d=0.01g e=0.1g	18-19
HCB 1002	1000g	0.01g	18-19
CB 1001	1000g	0.1g	21
EPB 1203i	1200g	0.001g	8-9
SPB 1203i CBX 1201	1200g	0.001g	10-11 20
HCB 1502	1200g	0.1g	18-19
CQT 1501	1500g 1500g	0.05g	17
DCT 2001		0.1g	22
CQT 2000	2000g	0.1g	
	2000g	1g	17 22
DCT 2000 EPB 2103i	2000g	1g	
	2100g	0.001g	8-9
SPB 2103i	2100g	0.001g	10-11
HCB 2202 LTB 2602e	2200g	0.01g	18-19
LTB 2602i	2600g	0.01g	12-13
	2600g	0.01g	12-13
CQT 2601 TBB 2610S	2600g 2610g	0.1g	17 23
TBB 26105	2610g 2610g	0.1g	23
HCB 3001	3000g	0.1g	18-19
HCB 3001M	3000g	0.1g d=0.5g e=0.5g	18-19
CBX 3001M	3000g	0.5g	20
LBX 3	3000g 3kg	0.5g	27
LBX 3H	3kg	0.1g	27
CB 3000	3000g	1g	21
ETB 3202e	3200g	0.01g	8-9
ETB 3202i	3200g	0.01g	8-9
STB 3202e	3200g	0.01g	10-11
STB 3202i	3200g	0.01g	10-11
LTB 3602e	3600g	0.01g	12-13
LTB 3602i	3600g	0.01g	12-13
CCT 4	4kg	0.1g	39
CKT 4	4kg	0.1g	28-29
ABW 4S	4kg	0.1g	46-47
ABW 4	4kg	0.5g	45
CCT 4M	4kg	1g	39
CKT 4M	4kg	1g	28-29
LTB 4602e	4600g	0.01g	12-13
	9	9	.= .5

Model	Capacity	Readability	Page
LTB 4602i	4600g	0.01g	12-13
CQT 5000	5000g	1g	17
DCT 5000	5000g	2g	22
LTB 6002e	6000g	0.01g	12-13
LTB 6002i	6000g	0.01g	12-13
LBB 6001e	6000g	0.1g	12-13
HCB 6001	6000g	0.1g	18-19
LBX 6	6kg	1g	27
LBX 6H	6kg	0.2g	27
CBX 6000	6000g	1g	20
CPWplus 6	6kg	0.002kg	30-31
GBK-Plus 6M	6kg	2g	32-33
GGS 6M	6kg	1g	48-49
ETB 6202e	6200g	0.01g	8-9
STB 6202e	6200g	0.01g	10-11
STB 6202i	6200g	0.01g	10-11
CCT 8UH	8kg	0.05g	39
CKT 8UH	8kg	0.05g	28-29
LBB 8001e	8000g	0.1g	12-13
CKT 8H	8kg	0.1g	28-29
GBK 8	8kg	0.1g	32-33
AGB 8	8kg	0.1g	34-35
BKT 8	8kg	0.1g	36-37
CCT 8	8kg	0.2g	39
CKT 8	8kg	0.2g	28-29
GB 8	8kg	0.1g	59
WS 8	8kg	0.5g	60-61
GGS 8	8kg	0.5g	48-49
CKT 8M	8kg	2g	28-29
ABW 8S	8kg	0.5g	46-47
ABW 8	8kg	0.1g	45
ETB 8202e	8200g	0.01g	8-9
STB 8202e	8200g	0.01g	10-11
LBB 12001e	12000g	0.1g	12-13
LBL 14001	14kg	0.1g	14-15
LBL 14001P	14kg	0.1g	14-15
LBX 12	12kg	2g	27
LBX 15H	15kg	0.5g	27
LBB 15001e	15000g	0.1g	12-13
GBK-Plus 15M	15kg	2g	32-33
GGS 15M	15kg	5g	48-49
CPWplus 15	15kg	0.005kg	30-31
AGB 15M	15kg	5g	34-35
LBL 24001	24kg	0.1g	14-15
LBL 24001P	24kg	0.1g	14-15
CCT 16UH	16kg	0.1g	39
CKT 16UH	16kg	0.1g	28-29
GBC 16	16kg	0.5g	40-41
AGB 16	16kg	0.5g	34-35
BCT 16	16kg	0.5g	42-43

Model	Capacity	Readability	Page
GB 16	16kg	0.2g	59
BKT 16	16kg	0.5g	36-37
CCT 16	16kg	0.5g	39
CKT 16	16kg	0.5g	28-29
GBK 16	16kg	0.5g	32-33
ABW 16S	16kg	1g	46-47
GGS 16	16kg	0.5g	48-49
WS 16	16kg	1g	60-61
ABW 16	16kg	2g	45
MTB 20	20kg	0.005kg	69
CCT 20M	20kg	5.000 kg	39
CKT 20M	20kg	5g	28-29
LBL 34001	34g	0.1g	14-15
LBL 34001P	34g	0.1g	14-15
GBK-Plus 30M	30kg	10g	32-33
GGS 30M	30kg	10g	48-49
GGB 30M	30kg	10g	48-49
AGB 30M	30kg	1g	34-35
LBX 30	30kg	5g	27
LBX 30H	30kg	1g	27
CCT 32UH	32kg	0.2g	39
CKT 32UH	32kg	0.2g	28-29
BCT 32	32kg	1g	42-43
CCT 32	32kg	1g	39
CKT 32	32kg	1g	28-29
GB 32	32kg	1g	59
GBK 32	32kg	1g	32-33
GBC 32	32kg	1g	40-41
ABW 32S	32kg	2g	46-47
WS 32	32kg	2g	60-61
ABW 32	32kg	5g	45
AGB 35	35kg	1g	34-35
WB 35	35kg	2g	60-61
CPWplus 35	35kg	0.01kg	30-31
CPWplus 35M	35kg	0.01kg	30-31
CPWplus 35L	35kg	0.01kg	30-31
GGS 35	35kg	1g	48-49
GGB 35	35kg	1g	48-49
CCT 40M	40kg	10g	39
CKT 40M	40kg	10g	28-29
CCT 48UH	48kg	0.5g	39
CKT 48UH	48kg	0.5g	28-29
CCT 48	48kg	2g	39
CKT 48	48kg	2g	28-29
SHS 50	50kg	0.01kg	54-55
GBC 60	60kg	2g	40-41
GBK 60	60kg	2g	32-33
GB 60	60kg	2g	59
BCT 60	60kg	2g	42-43
BKT 60	60kg	2g	36-37

Model	Capacity	Readability	Page
AGB 60M	60kg	20g	34-35
AGF 60M	60kg	20g	34-35
GBK-Plus 60M	60kg	20g	32-33
GFK-Plus 60M	60kg	20g	32-33
GGB 60M	60kg	20g	48-49
GGF 60M	60kg	20g	48-49
AGB 70	70kg	2g	34-35
GFK 75H	75kg	1g	32-33
GGB 75	75kg	2g	48-49
GGF 75	75kg	2g	48-49
GGF 75H	75kg	1g	48-49
GFC 75	75kg	5g	40-41
GFK 75	75kg	5g	32-33
BCT 75	75kg	5g	42-43
BKT 75	75kg	5g	36-37
WB 75	75kg	5g	60-61
WF 75	75kg	5g	60-61
GF 75	75kg	5g	59
CPWplus 75	75kg	0.02kg	30-31
CPWplus 75M	75kg	0.02kg	30-31
CPWplus 75L	75kg	0.02kg	30-31
GB 120	120kg	5q	59
GBK 120	120kg	5g	32-33
BKT 120	120kg	5g	36-37
AGF 150	150kg	5g	34-35
GGF 150	150kg	5g	48-49
GGL 150	150kg	5g	48-49
WF 150	150kg	10g	60-61
WL 150	150kg	10g	60-61
GFC 150	150kg	10g	40-41
GFK 150	150kg	10g	32-33
BCT 150	150kg	10g	42-43
BKT 150	150kg	10g	36-37
GF 150	150kg	10g	59
SHS 150	150kg	0.02kg	54-55
GFK 150H	150kg	2g	32-33
GBK-Plus 50M	150kg	50g	32-33
GFK-Plus 150M	150kg	50g	32-33
GGF 150M	150kg	50g	48-49
GGL 150M	150kg	50g	48-49
CPWplus 150	150kg	0.05kg	30-31
CPWplus 150M	150kg	0.05kg	30-31
CPWplus 150L	150kg	0.05kg	30-31
AGF 150M	150kg	50g	34-35
CPWplus 200	200kg	0.05kg	30-31
CPWplus 200M	200kg	0.05kg	30-31
CPWplus 200L	200kg	0.05kg	30-31
GGL 300	300kg	10g	48-49
WL 300	300kg	20g	60-61
AGF 300	300kg	10g	34-35
GFC 300	300kg	20g	40-41
GI C 300	Joong	ZUŸ	40-41

Model	Capacity	Readability	Page
GFK 300	300kg	20g	32-33
BCT 300	300kg	20g	42-43
BKT 300	300kg	20g	36-37
GF 300	300kg	20g	59
SHS 300	300kg	0.05kg	54-55
MDW 300L	300kg	0.05kg	70
MUW 300L	300kg	0.05kg	71
GFK-Plus 300M	300kg	100g	32-33
CPWplus 300L	300kg	0.1kg	30-31
AGF 300M	300kg	300g	34-35
LHS 500	500kg	0.1kg	54-55
PTM 500	500kg	0.1kg	58
AGF 600	600kg	20g	34-35
BKT 600	600kg	50g	36-37
GFK 600	600kg	50g	32-33
GF 600	600kg	50g	59
IHS 1	1000kg	0.2kg	54-55
AELP 1000	1000kg	0.02kg	51
PT 110	1000kg	0.02kg	56-57
PT 110S	1000kg	0.02kg	56-57
PT 112	1000kg	0.02kg	56-57
PT 112S	1000kg	0.02kg	56-57
PT 115	1000kg	0.02kg	56-57
PT 115S	1000kg	0.02kg	56-57
LHS 1500	1500kg	0.2kg	54-55
LHS 2000	2000kg	0.5kg	54-55
AELP 2000	2000kg	0.5kg	51
PTSplus 2000	2000kg	0.5kg	52
PTT 2000	2000kg	0.5kg	53
PT 310	3000kg	0.5kg	56-57
PT 310S	3000kg	0.5kg	56-57
PT 312	3000kg	0.5kg	56-57
PT 312S	3000kg	0.5kg	56-57
PT 315	3000kg	0.5kg	56-57
PT 315S	3000kg	0.5kg	56-57
IHS 3	3000kg	0.5kg	54-55
AELP 3000 PT 310-10S	3000kg	1kg	51
PT 310-10S	4500kg	1kg	56-57
PT 312-10S	4500kg	1kg	56-57
IHS 5	4500kg	1kg	56-57 54 55
	5000kg	1kg	54-55
IHS 10	10000kg	2kg	54-55

ANALYTICAL & PRECISION BALANCES



Adam Equipment's analytical balances offer solutions to the most complex and precise weighing tasks from formulation, statistical analysis, density determination, purity analysis to conformance testing. Not only do Adam's easy-to-use analytical range of balances simplify weighing tasks, they also produce reliable results ideal for data handling with multiple connectivity options and tracking capabilities that are compliant with GLP (Good Laboratory Practices).

Our precision balances consistently deliver increased efficiency and accurate results, even in testing laboratory environments. Equipped with a multitude of intuitive features and functions, Adam's precision balances are well-suited for laboratory use, quality control testing, manufacturing operations and production applications.



Equinox semi-micro, analytical and precision balances bring remarkable precision to labs that perform highly detailed testing. The Equinox is ideal for research and quality assurance facilities; science education; precision counting; and pharma/forensics applications needing exceptionally precise results.

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Statistics | Dynamic/Animal weighing | Density determination | Peak hold | Formulation | Textile | Accumulation





EPB



ETB



Customisable 5-inch 800x480 pixel touch-screen display



USB port for transferring data to a USB stick



Built-in memory for storage and quick access to products and settings

Features

- RS-232 interface provides speedy connection to computers and printers
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- · Selectable digital filtering helps minimise effects of vibration and disturbances
- Security password control prevents unauthorised access
- Security slot for optional lock and cable
- Parts counting with freely selectable sample sizes
- Multilingual display permits use in various regions
- Large, grade 304 stainless steel pan
- Memory accumulation totals results
- Checkweighing with audible alarm

- · Weighing units: g, mg, ct, GN, lb, oz, dwt, mm, ozt, tl.H, tl.S, tl.T, T, custom unit
- Interface: RS-232, USB
- Power supply: 24VDC 1A adapter*
- · Display: Touchscreen with 13mm-high digits
- Calibration: External, Internal automatic
- Housing: ABS Plastic
- Operating temperature: 10° to 30°C
- * 363 e/i and 3202 e/i models use a 9VDC 1A power supply


























Anti-Vibration Table See pg. 79







EPB Precision Balance



EAB Analytical Balance

ETB Precision Balance

Model	Capacity	Readability	Pan Size	Net Weight
EAB 125i	62g / 120g	0.01mg/ 0.1mg	80mm ø	7.2kg
EAB 225i	82g / 220g	0.01mg/ 0.1mg	80mm ø	7.2kg
EAB 124i	120g	0.0001g	80mm ø	7.2kg
EAB 224i	220g	0.0001g	80mm ø	7.2kg
EAB 314i	310g	0.0001g	80mm ø	7.2kg
EAB 414i	410g	0.0001g	80mm ø	7.2kg
EAB 124e	120g	0.0001g	80mm ø	7.2kg
EAB 224e	220g	0.0001g	80mm ø	7.2kg
EAB 314e	310g	0.0001g	80mm ø	7.2kg
EPB 363i	360g	0.001g	110mm ø	6.9kg
EPB 723i	720g	0.001g	110mm ø	6.9kg
EPB 1203i	1200g	0.001g	110mm ø	6.9kg
EPB 2103i	2100g	0.001g	110mm ø	6.9kg
EPB 363e	360g	0.001g	110mm ø	6.6kg
EPB 723e	720g	0.001g	110mm ø	6.6kg
ETB 3202i	3200g	0.01g	185x185mm	6.9kg
ETB 3202e	3200g	0.01g	185x185mm	6.6kg
ETB 6202e	6200g	0.01g	185x185mm	6.6kg
ETB 8202e	8200g	0.01g	185x185mm	6.6kg

Note: Draft shield not included with ETB (top loader) models.

With a high-resolution graphic display and intuitive features, Solis semi-micro, analytical and precision balances provide an outstanding solution for a variety of lab applications. Versatile and resilient, the Solis is ideal for research and quality assurance labs; science education; precision counting; and production and manufacturing applications.

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Dynamic/Animal weighing | Density determination | Peak hold | Formulation | Textile | Accumulation





SPB



STB



High-resolution graphic display shows detailed information



RS-232 interface provides speedy connection to computers and printers



Selectable digital filtering helps minimise effects of vibration and disturbances

Features

- · Large, grade 304 stainless steel pan allows for quick and easy cleaning
- · Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Multilingual display permits use in various regions
- Checkweighing with audible alarm
- · Parts counting with preset sample sizes
- · Security slot for optional lock and cable
- Store up to 99 ingredients in formulation mode

- · Weighing units: g, mg, lb, oz, ct, GN, dwt, mm, ozt, T, tl.H, tl.S, tl.T, custom unit
- Interface: RS-232
- Power supply: 24VDC 1A adapter*
- Display: Graphic display with 15mm-high digits
- Calibration: External, Internal automatic
- Housing: ABS Plastic
- Operating temperature: 10° to 30°C
- * 363 e/i and 3202 e/i models use a 9VDC 1A power supply


























ATP2 Thermal Printer See pg. 80







SPB Precision Balance



STB Precision Balance

Model	Capacity	Readability	Pan Size	Net Weight
SAB 125i	62g / 120g	0.01mg/ 0.1mg	80mm ø	7kg
SAB 225i	82g / 220g	0.01mg/ 0.1mg	80mm ø	7kg
SAB 124i	120g	0.0001g	80mm ø	7kg
SAB 224i	220g	0.0001g	80mm ø	7kg
SAB 314i	310g	0.0001g	80mm ø	7kg
SAB 514i	510g	0.0001g	80mm ø	7kg
SAB 124e	120g	0.0001g	80mm ø	6.7kg
SAB 224e	220g	0.0001g	80mm ø	6.7kg
SAB 314e	310g	0.0001g	80mm ø	6.7kg
SPB 363i	360g	0.001g	110mm ø	6.7kg
SPB 723i	720g	0.001g	110mm ø	6.7kg
SPB 1203i	1200g	0.001g	110mm ø	6.7kg
SPB 2103i	2100g	0.001g	110mm ø	6.7kg
SPB 363e	360g	0.001g	110mm ø	6.4kg
SPB 723e	720g	0.001g	110mm ø	6.4kg
STB 3202i	3200g	0.01g	185x185mm	6.7kg
STB 6202i	6200g	0.01g	185x185mm	6.7kg
STB 3202e	3200g	0.01g	185x185mm	6.4kg
STB 6202e	6200g	0.01g	185x185mm	6.4kg
STB 8202e	8200g	0.01g	185x185mm	6.4kg

Note: Draft shield not included with STB (top loader) models.

Luna balances are designed with an array of features and functions to accommodate most lab applications. The Luna range offers improved performance for faster, more accurate readings. With stylish, modern backlighting, Luna's impressive display gives an aura of smart sophistication.





LPB



LTB/LBB



Weighing | Parts counting | Percentage weighing | Checkweighing | Check counting | Dynamic/Animal weighing | Density determination



LCD display with large, bright digits on a black background



USB-A and RS-232 interfaces provide speedy communication with computers



Large, grade 304 stainless steel pan allows for easy cleaning

Features

- · Sealed keypad protects against dirt and spills
- Multilingual display permits use in various regions
- Parts counting with preset sample sizes
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- · Selectable digital filtering for animal/dynamic weighing enables consistent results for moving subjects
- Security slot for optional lock and cable
- Weigh-below hook for density measurement

- Weighing units: g, mg, ct, GN, lb, oz, dwt, mm, ozt, tl.H, tl.S, tl.T, T, custom unit
- Interface: RS-232, USB
- Power supply: 18VDC 830mA adapter
- · Display: Backlit LCD with 24mm-high digits
- · Calibration: External, Internal automatic
- · Housing: ABS Plastic
- Operating temperature: 10° to 30°C






















Anti-Vibration Table See pg. 79





LPB Precision Balance



LAB Analytical Balance

LTB/LBB Precision Balance

Model	Capacity	Readability	Pan Size	Net Weight
LAB 124i	120g	0.0001g	80mm ø	6.2kg
LAB 214i	210g	0.0001g	80mm ø	6.2kg
LAB 254i	250g	0.0001g	80mm ø	6.2kg
LAB 124e	120g	0.0001g	80mm ø	5.8kg
LAB 214e	210g	0.0001g	80mm ø	5.8kg
LAB 254e	250g	0.0001g	80mm ø	5.8kg
LPB 223i	220g	0.001g	120mm ø	4.5kg
LPB 423i	420g	0.001g	120mm ø	4.5kg
LPB 623i	620g	0.001g	120mm ø	6.3kg
LPB 823i	820g	0.001g	120mm ø	6.3kg
LPB 223e	220g	0.001g	120mm ø	4.1kg
LPB 423e	420g	0.001g	120mm ø	4.1kg
LPB 623e	620g	0.001g	120mm ø	5.9kg
LPB 823e	820g	0.001g	120mm ø	5.9kg
LTB 2602i	2600g	0.01g	185x185mm	5.9kg
LTB 3602i	3600g	0.01g	185x185mm	5.9kg
LTB 4602i	4600g	0.01g	185x185mm	5.9kg
LTB 6002i	6000g	0.01g	185x185mm	5.9kg
LTB 2602e	2600g	0.01g	185x185mm	4.5kg
LTB 3602e	3600g	0.01g	185x185mm	4.5kg
LTB 4602e	4600g	0.01g	185x185mm	4.5kg
LTB 6002e	6000g	0.01g	185x185mm	4.5kg
LBB 6001e	6000g	0.1g	185x185mm	4.5kg
LBB 8001e	8000g	0.1g	185x185mm	4.5kg
LBB 12001e	12000g	0.1g	185x185mm	4.5kg
LBB 15001e	15000g	0.1g	185x185mm	4.5kg

Note: Draft shield not included with LTB/LBB (top loader) models.



The Luna LBL combines the rugged durability of a heavy-duty base with the vivid, unmistakable clarity of the large, Luna-style weight display. LBLs are available in high capacities, while retaining a fine 0.1g readability.



LBL with Pillar

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Dynamic/ Animal weighing | Density determination



LCD display with large, bright digits on a black background



Robust, heavy-duty base with grade 304 stainless steel weighing pan



Send weight data to printers/PCs via RS-232, USB or Ethernet

Features

- · Heavy duty weighing base and large, crystal-clear weight display
- Sealed keypad protects against dirt and spills
- · Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Connect to a computer network with the RJ45 ethernet connector
- · Optional weigh-below hook for suspended weighing
- Lockdown device to secure balance
- · Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- · Multilingual display allows use in many different countries

- Weighing units: g, kg, mg, ct, GN, N, lb, oz, lb:oz, ozt, dwt, T, custom unit
- Interface: RS-232, USB, Ethernet RJ45
- Power Supply: 18VDC 830mA adapter, internal rechargeable battery (optional)
- Battery life (up to): 50 hours
- Display: Backlit LCD with 24mm-high digits
- Calibration: External
- Housing: ABS plastic indicator, die-cast aluminium weighing base
- Operating temperature: 15° to 35°C


















Weigh-below Hook See pg. 76

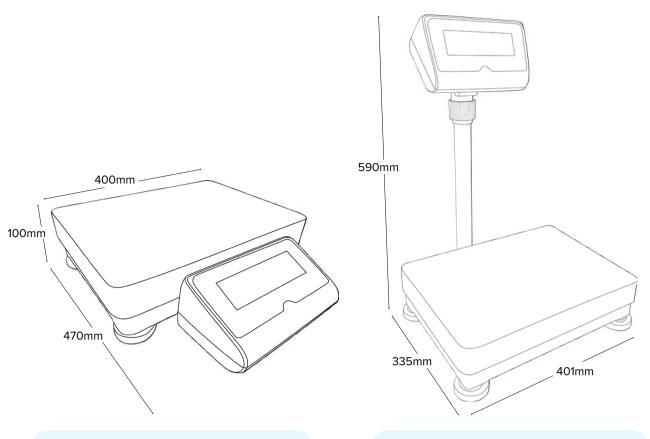

LBL Body-Mounted Balance

LBL Pillar-Mounted Balance

Model	Capacity	Readability	Pan Size	Net Weight
LBL 14001	14kg	0.1g	400x300mm	8.6kg
LBL 24001	24kg	0.1g	400x300mm	8.6kg
LBL 34001	34kg	0.1g	400x300mm	8.6kg
LBL 14001P	14kg	0.1g	400x300mm	8.6kg
LBL 24001P	24kg	0.1g	400x300mm	8.6kg
LBL 34001P	34kg	0.1g	400x300mm	8.6kg

DID YOU KNOW?

LBL precision balances feature an improved precision load cell, as well as a rigid frame for better accuracy at high resolution.



Adam Equipment's portable compact precision balances are the right choice for labs, classrooms field settings or manufacturing operations. Lightweight and easy to operate, they are powered by AC adapter or battery, allowing use in the field or at remote testing locations where electricity is unavailable.

Compact balances are well-suited for performing basic mass measurement in general science lessons, chemistry labs and physics classrooms.

Models with a special stackable design are an excellent solution for labs or classrooms with limited space. Plus, Adam balances can perform quality control tasks and measurement for packaging and filling in small manufacturing facilities or food processing plants.

Model Quick Finder

	CQT	НСВ	СВХ	СВ	DCT	ТВВ
Stainless steel weighing pan	•	•	•	•		•
RS-232/USB interface		•				
Sealed keypad	•	•	•	•	•	
Internal rechargeable battery		•	•			
Battery power	•			•	•	
Stackable for easy storage	•	•				
Shockprotect® overload protection	•	•				
Internal automatic calibration		•				



No balance can beat the Core for basic weighing value. Core's housing is simple to clean and designed to stack for easy storage. A basic keypad with dual tare keys makes Core balances easy to use.



Large, grade 304 stainless steel pan for easy cleaning



Shockprotect® helps protect internal components from damage if overloaded



CQT without Draft Shield

Applications Weighing



120mm pan models offer a stackable design for easy storage

Features

- Vivid backlit LCD easily visible in any lighting conditions
- · Hook included for weighing below the balance
- · Audible overload alarm warns when capacity is exceeded
- Zero-tracking feature ensures display returns to zero reading
- Security slot for optional security lock and cable to help prevent theft

Model	Capacity	Readability	Pan Size	Net Weight
CQT 202	200g	0.01g	120mm ø	0.9kg
CQT 251	250g	0.1g	120mm ø	0.9kg
CQT 601	600g	0.1g	120mm ø	0.9kg
CQT 1501	1500g	0.1g	120mm ø	0.9kg
CQT 2601	2600g	0.1g	145mm ø	0.9kg
CQT 2000	2000g	1g	145mm ø	0.9kg
CQT 5000	5000g	1g	145mm ø	0.9kg

- Weighing units: g, kg, lb, oz, N, GN, ct, dr, tl.T
- Power supply: 12VDC 500mA adapter, 6 x AA Batteries
- Display: Backlit LCD with 18mm-high digits
- · Calibration: External
- · Housing: ABS Plastic
- Operating temperature: 0° to 40°C




















Highland precision balances are well-suited for lab work, field use, and many industrial applications. Designed to be stackable for easy storage, the Highland features Shockprotect® as a safeguard against shock loading and accidental overload.



USB-B and RS-232 for speedy communication with printers and PCs



Shockprotect® helps protect internal components from overload damage



HCB without Draft Shield

Applications

Weighing | Parts counting | Percentage weighing | Accumulation



Stackable design for easy storage of multiple units (except HCB 6001)

Features

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display for easily monitoring possible overloads
- Solid ABS housing is durable for industrial use
- Hook included for weighing below the balance
- Audible overload alarm warns when capacity is exceeded
- Zero-tracking feature ensures display returns to zero reading
- Parts counting with preset sample sizes
- Memory accumulation totals results
- Selectable digital filtering helps minimise effects of vibration and disturbances
- HandiCal® internal calibration eliminates need for external weight set*

General Specifications

· Weighing units:

HCB: g, lb, oz, N, GN, ct, dr, dwt, mm, ozt, T, tl.H, tl.S, tl.T*

HCBM: g, ct, kg

- Interface: RS-232, USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 50 hours
- Display: Backlit LCD with 18mm-high digits
- Calibration: External, Internal automatic
- · Housing: ABS Plastic
- Operating temperature: 0° to 40°C

*lb, oz, and lb:oz are not legal for trade weighing units


























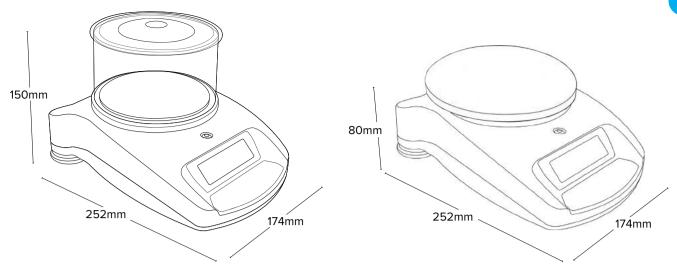

HCB Precision Balance w/ draft shield

HCB 6001 Precision Balance

Model	Capacity	Readability	Pan Size	Net Weight
HCB 123	120g	0.001g	120mm ø	2kg
HCB 153	150g	0.005g	120mm ø	2kg
HCB 302	300g	0.01g	120mm ø	2kg
HCB 602	600g	0.02g	120mm ø	2kg
HCB 602H	600g	0.01g	120mm ø	2kg
HCB 1002	1000g	0.01g	120mm ø	2kg
HCB 1502	1500g	0.05g	120mm ø	2kg
HCB 2202	2200g	0.01g	120mm ø	2kg
HCB 3001	3000g	0.1g	120mm ø	2kg
HCB 6001	6000g	0.1g	145mm ø	2kg

Trade Approved Models M

Model	Capacity	Readability	Pan Size	Net Weight
HCB 602M	600g	d=0.01g e=0.1g	120mm ø	2kg
HCB 1002M	1000g	d=0.01g e=0.1g	120mm ø	2kg

DID YOU KNOW?



The internal automatic calibration function of every HCB model helps your balance stay accurate – and means there's no need for external weights to calibrate the unit. Precision weighing peace of mind, for schools, labs and industrial users.



Calibration Certificate

CBX portable balances offer a standard USB-rechargeable battery for convenient charging. Sturdy construction and easy operation deliver reliable weighing and counting results.





Vivid, backlit LCD easily visible in any lighting conditions



Low-voltage USB input for flexibility powering the device




Grade 304 stainless steel pan for quick and easy cleaning

Features

- · Solid ABS housing is durable for industrial use
- Simple key operation allows for easy set up and operation
- Rechargeable battery included for operation almost anywhere
- Parts counting with preset sample sizes

Model	Capacity	Readability	Pan Size	Net Weight
CBX 1201	1200g	0.1g	148x148mm	0.6kg
CBX 3001	3000g	0.5g	148x148mm	0.6kg
CBX 6000	6000g	1g	148x148mm	0.6kg

- Weighing units: g, N, lb, oz
- Power supply: USB option, 5VDC 1A adapter, Internal rechargeable battery
- Battery life (up to): 216 hours
- · Display: Backlit LCD with 18mm-high digits
- · Calibration: External
- Housing: ABS Plastic
- · Operating temperature: 0° to 40°C











Power Adapter

The CB compact scale boasts best-in-class performance and value. Its grade 304 stainless steel pan, sealed keypad and one-piece housing are easy to clean.





Vivid, backlit LCD easily visible in any lighting conditions



Grade 304 stainless steel pan for quick and easy cleaning




Battery or mains operation for portability and flexibility

Features

- · Lightweight design simplifies transport and portability
- Sealed keypad protects against dirt and spills
- Simple operation allows quick startup and use with little or no training
- Zero-tracking feature ensures display returns to zero reading

Model	Capacity	Readability	Pan Size	Net Weight
CB 501	500g	0.1g	130mm ø	0.4kg
CB 1001	1000g	0.1g	130mm ø	0.4kg
CB 3000	3000g	1g	130mm ø	0.4kg

- · Weighing units: g, lb, oz
- Power supply: 2 x AA Batteries, 6VDC 200mA adapter (optional)
- · Display: LCD with 12mm-high digits
- Calibration: External
- · Housing: ABS Plastic
- Operating temperature: 0° to 40°C













High contrast display easily visible from a distance



Compact, lightweight design for use anywhere



DCT with Draft Shield

Applications Weighing



Large pan removes easily for speedy cleaning

Features


- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and spills
- Zero-tracking feature ensures display returns to zero reading

Model	Capacity	Readability	Pan Size	Net Weight
DCT 302	300g	0.01g	100mm ø	0.5kg
DCT 201	200g	0.1g	145x145mm	0.5kg
DCT 601	600g	0.1g	145x145mm	0.5kg
DCT 2001	2000g	0.1g	145x145mm	0.5kg
DCT 2000	2000g	1g	145x145mm	0.5kg
DCT 5000	5000g	2g	145x145mm	0.5kg

General Specifications

- Weighing units: g, lb*, oz
- Power supply: 6x AA Batteries, 12VDC 500mA adapter
- Display: LCD with 15mm-high digits
- · Calibration: External
- · Housing: ABS Plastic
- Operating temperature: 0° to 40°C

*Ib not available in DCT 302 or DCT 201















Adam Equipment's patented TBB triple beam balance offers superb value for teaching mass measurement concepts. Sturdy metal housing and grade 304 stainless steel pan help the balance withstand daily student use.

ApplicationsWeighing



Large, grade 304 stainless steel pan for easy cleaning



Supplied with tripod legs for using a weigh-below hook




Handy storage space for counter weights

Features

- Magnetic damping slows pointer movement for faster readings
- Notched, tiered, graduated beams ensure positive positioning and accurate reading of results
- Security slot for optional lock and cable to help prevent theft
- Optional hook enables below-balance weighing with legs attached
- The TBB 2610T is equipped with a 225g tare range

Model	Capacity	Readability	Pan Size	Net Weight
TBB 2610S	2610g	0.1g	152mm ø	2.7kg
TBB 2610T	2610g	0.1g	152mm ø	2.7kg

- · Weighing units: g
- Display: Graduated beam with 7mm-high digits
- Calibration: External
- Housing: Die-cast aluminium









Fast and efficient, the PMB Moisture Analyser by Adam Equipment provides an alternative to the time-consuming method of oven testing. The PMB not only hastens the drying process, it minimises the possibility of burning a sample, which can produce false results.

PMB uses the "loss-on-drying" technique to simultaneously weigh and heat the sample, reducing the testing period and providing greater measurement accuracy. In many cases, the PMB can replace traditional oven testing and also the Karl Fischer titration method of analysing moisture.









Temp Calibration Kit

Sample Pans

With simple operation and rapid response time, the PMB offers top value in moisture analysis. USB and RS-232 interfaces facilitate connectivity, whilst a second USB port allows storage of test programmes and data on flash drives.

Applications

Weighing | Moisture determination



USB host for memory card, USB I/O and RS-232 interfaces



Four preset drying methods allow test routines for a wide variety of samples



Pan lifter allows easy placement and removal of samples

Features

- Scratch-resistant aluminium housing
- Temperature range 50°C to 160°C in one-degree increments
- Three settings for heating sample include ramp-up, stepped temperatures and single temperature
- Audible overload alarm warns when capacity is exceeded
- Multilingual display permits use in various regions
- Internal memory stores 49 different recipes and up to 99 test results, and additional test results and settings can be stored on a flash drive

Model	Capacity	Readability	Pan Size	Net Weight
PMB 53	50g	0.001g / 0.01%	100mm ø	6kg
PMB 163	160g	0.001g / 0.01%	100mm ø	6kg
PMB 202	200g	0.01g / 0.05%	100mm ø	6kg

- Weighing units: g, %M, %S, ATRO %M, ATRO %S
- Interface: RS-232, USB
- Power supply: Power cord
- Display: Backlit LCD with 24mm-high digits
- · Calibration: External
- · Housing: Die-cast aluminium
- Operating temperature: 0° to 40°C




















Adam Equipment's durable bench and floor scales are dependable weighing solutions for a wide variety of industries. Simple to operate, these industrial scales offer the functions and features needed to improve efficiency and increase productivity in factories and warehouses, on assembly lines or loading docks, during shipping and receiving activities, and at manufacturing locations.

Available in a range of capacities and readabilities, Adam's bench and floor scales have sturdy stainless steel weighing pans and platforms in a choice of sizes to meet your needs – from basic weighing to checkweighing, packaging and monitoring inventory, and performing quality control tasks.


Model Quick Finder

	LBX	СКТ	CPWplus	GFK & GBK	AGB & AGF	вкт
Stainless steel weighing pan	•	•	•	•	•	•
RS-232 interface			•	•		
Sealed keypad	•	•	•	•	•	•
Checkweighing function		•		•		
Basic checkweighing	•					•
Built-in printer						
Optional Printer		•	•	•	•	•
Memory accumulation function		•		•		•



With simple operation and a variety of modes, our robust, dependable Latitude compact bench scales deliver excellent value for quick, basic weighing and counting needs.









In-Use Cover

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Display hold



Checkweighing LEDs show under, over or within limits



Rugged construction stands up to industrial use




Rechargeable battery included for operation almost anywhere

Features

- · Vivid, backlit LCD easily visible in any lighting conditions
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and spills
- · Large, grade 304 stainless steel pan allows for swift cleaning
- Checkweighing with audible alarm
- · Hold function freezes the displayed weight
- Parts counting with preset sample sizes
- Simple operation allows quick startup and use with little or no training


Model	Capacity	Readability	Pan Size	Net Weight
LBX 3	3kg	0.5g	245x180mm	2.5kg
LBX 6	6kg	1g	245x180mm	2.5kg
LBX 12	12kg	2g	245x180mm	2.5kg
LBX 30	30kg	5g	245x180mm	2.5kg

- Weighing units: g, kg, lb, lb:oz, oz
- Power supply: 5VDC 1A adapter, Internal rechargeable battery
- Battery life (up to): 210 hours
- · Display: Backlit LCD with 24mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C

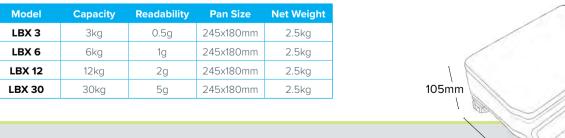













Large & Small Scoops

Hard Carrying Case

Ideal for inventory control or packaging tasks, the Cruiser CKT can save money by reducing waste and overages. Repetitive checkweighing tasks are accomplished quickly with a backlit display that changes colour to show if a sample is under, over, or within the preset limits.

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Check counting | Net total weighing | Accumulation



Display changes colour for quick notification of checkweighing limits



Checkweighing function features audible alarm



Sealed keypad protects against dirt and spills

Features

- Large, grade 304 stainless steel pan allows for quick cleaning
- Rechargeable battery included for operation almost anywhere
- Internal counting resolution 1:1,600,000 for precise results
- RS-232 for speedy communication to PCs and printers
- Optional USB interface for data communication
- Solid ABS housing for industrial use
- Drip channels help divert spills away from internal components
- Parts counting optimisation automatically refines piece weight as parts are added
- Piece counting with freely selectable sample sizes
- Preset tare function
- · Optional weigh-below hook ideal for materials testing applications

General Specifications

- Weighing units: g, kg, lb, oz, lb:oz*
- Interface: RS-232, Optional USB
- Power Supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 100 hours
- Display: Backlit LCD with 15mm-high digits
- · Calibration: External
- · Housing: ABS Plastic
- Operating temperature: -10° to 40°C

*lb, oz, and lb:oz are not legal for trade weighing units






















*Hook/USB optional

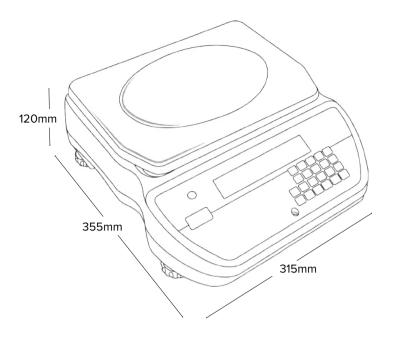

Model	Capacity	Readability	Pan Size	Net Weight
CKT 4	4kg	0.1g	300x210mm	3.3kg
CKT 8	8kg	0.2g	300x210mm	3.3kg
CKT 8H	8kg	0.1g	300x210mm	3.3kg
CKT 16	16kg	0.5g	300x210mm	3.3kg
CKT 32	32kg	1g	300x210mm	3.3kg
CKT 48	48kg	2g	300x210mm	3.3kg
CKT 8UH	8kg	0.05g	300x210mm	3.3kg
CKT 16UH	16kg	0.1g	300x210mm	3.3kg
CKT 32UH	32kg	0.2g	300x210mm	3.3kg
CKT 48UH	48kg	0.5g	300x210mm	3.3kg

Trade Approved Models M

Model	Capacity	Readability	Pan Size	Net Weight
CKT 4M	4kg	1g	300x210mm	3.3kg
CKT 8M	8kg	2g	300x210mm	3.3kg
CKT 20M	20kg	5g	300x210mm	3.3kg
CKT 40M	40kg	10g	300x210mm	3.3kg







CPWplus P

CPWplus M

Durable and versatile, CPWplus weighing scales feature a wide selection of sizes and configurations. The CPWplus is able to accommodate many industrial jobs, including concrete testing in the field, warehouse tasks or shipping and receiving duties, as well as animal weighing within veterinary practices, zoos and at home.



CPWplus L



Grade 304 stainless steel base available in three sizes



Separate indicator that can be wall-mounted with the bracket provided



Hold function freezes the display, allowing time to elapse without losing the result

Features

- · Rugged construction stands up to industrial use
- Splash-proof housing, keypad and display are easy to clean
- "L" models feature handles and wheels on the base for transportation
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading

- · Weighing units: kg, lb, lb:oz, oz
- Interface: RS-232
- Power supply (Standard and P Models): 12VDC 500mA adapter, 6 x AA Batteries
- Power supply (L and M Models): 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 210 hours (L and M Models)
- Display: Backlit LCD with 22mm-high digits
- Calibration: External
- Housing: Mild steel base with aluminium extrusion display
- · Operating temperature: 0° to 40°C




















Non-slip Rubber Mat See pg. 77




CPWplus - Standard Pan



CPWplus P - Pillar Mount



CPWplus M - Medium Pan

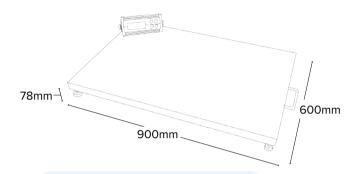

CPWplus L - Large Pan

Model	Capacity	Readability	Pan Size	Net Weight
CPWplus 6	6kg	0.002kg	300x300mm	4kg
CPWplus 15	15kg	0.005kg	300x300mm	4kg
CPWplus 35	35kg	0.01kg	300x300mm	4kg
CPWplus 75	75kg	0.02kg	300x300mm	4kg
CPWplus 150	150kg	0.05kg	300x300mm	4kg
CPWplus 200	200kg	0.05kg	300x300mm	4kg
CPWplus 6P	6kg	0.002kg	300x300mm	4kg
CPWplus 15P	15kg	0.005kg	300x300mm	4kg
CPWplus 35P	35kg	0.01kg	300x300mm	4kg
CPWplus 75P	75kg	0.02kg	300x300mm	4kg
CPWplus 150P	150kg	0.05kg	300x300mm	4kg
CPWplus 200P	200kg	0.05kg	300x300mm	4kg
CPWplus 35M	35kg	0.01kg	500x500mm	8.9kg
CPWplus 75M	75kg	0.02kg	500x500mm	8.9kg
CPWplus 150M	150kg	0.05kg	500x500mm	8.9kg
CPWplus 200M	200kg	0.05kg	500x500mm	8.9kg
CPWplus 35L	35kg	0.01kg	900x600mm	14.4kg
CPWplus 75L	75kg	0.02kg	900x600mm	14.4kg
CPWplus 150L	150kg	0.05kg	900x600mm	14.4kg
CPWplus 200L	200kg	0.05kg	900x600mm	14.4kg
CPWplus 300L	300kg	0.1kg	900x600mm	14.4kg

Ideal for industrial settings, GBK and GFK checkweighing scales are the answer for businesses that need heavy-duty durability and speed. Available in Standard, Plus or PlusM set-ups, with a colour changing backlight to make checkweighing even easier.

Applications

Weighing | Basic parts counting | Percentage weighing | Checkweighing | Accumulation | Dynamic/Animal weighing (GK-Plus/PlusM) | Net total weighing (GK-Plus/PlusM)









Simple, 5-button keypad layout for quick and easy weighing tasks



Full numeric keypad for easier checkweighing



Trade approved for applications where weight determines price

Common Features

- Unmistakable results every time from a bright, clear display
- Backlight changes colour (red, amber, green) during checkweighing
- · Sealed keypad to protect against dirt and spills
- · Capacity tracker built into display for easily monitoring possible overloads
- RS-232 (and optional USB) interfaces provide speedy connection to computers and printers
- Memory accumulation totals results
- Basic parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- 1:1,600,000 internal counting resolution for precise results

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz*
- Interface: RS-232, Optional USB
- Power supply: Power cord, internal rechargeable battery (optional extra on Standard models)
- Battery life (up to): 120 hours
- Display: LCD with 40mm-high digits
- Calibration: External
- · Housing: ABS Plastic indicator with mild steel base
- Operating temperature: -10° to 40°C

*lb, oz, and lb:oz are not legal for trade weighing units



Backlight changes colour during checkweighing



























GBK Bench Scale

GFK Floor Scale

GFK 600 Floor Scale

	Model	Capacity	Readability	Pan Size	Net Weight
	GBK-S 8	8kg	0.1g	400x300mm	7.6kg
	GBK-S 16	16kg	0.5g	400x300mm	7.6kg
픪	GBK-S 32	32kg	1g	400x300mm	7.6kg
	GBK-S 60	60kg	2g	400x300mm	7.6kg
$\mathbf{\Sigma}$	GBK-S 120	120kg	5g	400x300mm	7.6kg
Δ	GFK-S 75	75kg	5g	500x400mm	12.5kg
AR	GFK-S 75H	75kg	1g	500x400mm	12.5kg
$\frac{1}{2}$	GFK-S 50	150kg	10g	500x400mm	12.5kg
₫	GFK-S 150H	150kg	2g	500x400mm	12.5kg
S	GFK-S 300	300kg	20g	500x400mm	12.5kg
	GFK-S 600	600kg	50g	800x600mm	25.5kg

	Model	Capacity	Readability	Pan Size	Net Weight
	GBK-Plus 8	8kg	0.1g	400x300mm	7.6kg
	GBK-Plus 16	16kg	0.5g	400x300mm	7.6kg
	GBK-Plus 32	32kg	1g	400x300mm	7.6kg
	GBK-Plus 60	60kg	2g	400x300mm	7.6kg
	GBK-Plus 120	120kg	5g	400x300mm	7.6kg
Σ	GFK-Plus 75	75kg	5g	500x400mm	12.5kg
മ	GFK-Plus 75H	75kg	1g	500x400mm	12.5kg
글	GFK-Plus 150	150kg	10g	500x400mm	12.5kg
	GFK-Plus 150H	150kg	2g	500x400mm	12.5kg
	GFK-Plus 300	300kg	20g	500x400mm	12.5kg
	GFK-Plus 600	600kg	50g	800x600mm	25.5kg

Model	Capacity	Readability	Pan Size	Net Weight
GBK-Plus 6M	6kg	2g	400x300mm	7.6kg
GBK-Plus 15M	15kg	5g	400x300mm	7.6kg
GBK-Plus 30M	30kg	10g	400x300mm	7.6kg
GBK-Plus 60M	60kg	20g	400x300mm	7.6kg
GBK-Plus 150M	150kg	50g	400x300mm	7.6kg
GFK-Plus 60M	60kg	20g	500x400mm	12.5kg
GFK-Plus 150M	150kg	50g	500x400mm	12.5kg
GFK-Plus 300M	300kg	100g	500x400mm	12.5kg

Easy to operate AGB and AGF stainless steel scales are well-suited for use in warehouses, shipping and receiving areas, factories and production facilities. The scales offer capacities from 8kg to 600kg and perform a variety of weighing tasks. Featuring an internal rechargeable battery, the AGB/AGF can be used in locations where power is unavailable.

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Check counting | Dynamic/Animal weighing | Display hold | Peak hold





AGB without Pillar



Display backlight changes colour during checkweighing



Rugged, IP68-certified waterproof indicator can be washed down



Large, grade 304 stainless steel pan for easy cleaning

Features

- · Rugged construction stands up to industrial use
- RS-232 interface provides speedy connection to computers and printers
- Rechargeable battery included for operation almost anywhere
- Hold function freezes the displayed weight, allowing time to elapse without losing the result
- · Checkweighing with audible alarm
- Parts counting with preset sample sizes
- Preset tare function speeds the process of repetitive weighing
- Selectable digital filtering for dynamic/animal weighing enables consistent results for moving subjects

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz*
- Interface: RS-232
- Power supply: Fixed mains power cord, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 40mm-high digits
- · Calibration: External
- Housing: Stainless steel indicator with mild steel base
- Operating temperature: -10° to 40°C

*lb, oz, and lb:oz are not legal for trade weighing units





















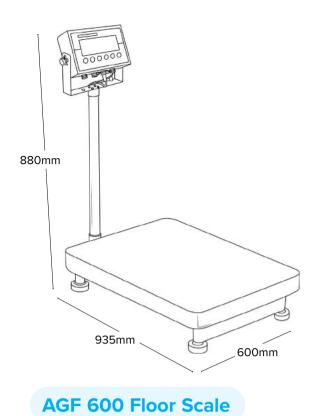



AGB Bench Scale



AGF Floor Scale

Model	Capacity	Readability	Pan Size	Net Weight
AGB 8	8kg	0.1g	400x300mm	14kg
AGB 16	16kg	0.2g	400x300mm	14kg
AGB 35	35kg	0.5g	400x300mm	14kg
AGB 70	70kg	1g	400x300mm	14kg
AGF 150	150kg	5g	500x400mm	18kg
AGF 300	300kg	10g	500x400mm	18kg
AGF 600	600kg	20g	800x600mm	35kg

Trade Approved Models M

Model	Capacity	Readability	Pan Size	Net Weight
AGB 6M	6kg	2g	400x300mm	14kg
AGB 15M	15kg	5g	400x300mm	14kg
AGB 30M	30kg	10g	400x300mm	14kg
AGB 60M	60kg	20g	400x300mm	14kg
AGF 60M	60kg	20g	500x400mm	18kg
AGF 150M	150kg	50g	500x400mm	18kg
AGF 300M	300kg	100g	500x400mm	18kg

BKT label printing scales offer the durability needed for manufacturing, packing, distribution, shipping and receiving tasks. The scale features a built-in printer for creating labels with weight, QR codes, barcodes and more in numerous languages.





BKT Bench Scale

Applications

Weighing | Basic parts counting | Percentage weighing | Checkweighing | Accumulation | Dynamic/Animal weighing | Display hold | Peak hold | Barcode/Label printing





BKT without Pillar



Large, 34mm-high digits on vivid, backlit display



Grade 304 stainless steel pan stands up to industrial use



Built-in printer - get weight data, QR codes, barcodes and more

Features

- · RS-232 interface provides speedy connection to computers and printers
- · Checkweighing function with audible alarm
- Sealed keypad protects against dirt and spills
- Overload protection helps prevent damage to internal components
- Memory accumulation totals results
- · Parts counting optimisation automatically refines piece weight as parts are added
- Rechargeable battery included for operation almost anywhere
- Selectable digital filtering helps minimise effects of vibration and disturbances

- · Weighing units: g, kg, lb, lb:oz, oz
- Interface: RS-232
- Power supply: 12VDC 3A adapter, 10Ah Internal rechargeable battery
- Battery life (up to): 110 hours
- · Display: Backlit LCD with 34mm-high digits
- Calibration: External
- Housing: ABS Plastic indicator with mild steel base
- Standard label size (WxH): 50x30mm (labels up to 60mm height can be used)
- Operating temperature: -10° to 40°C






















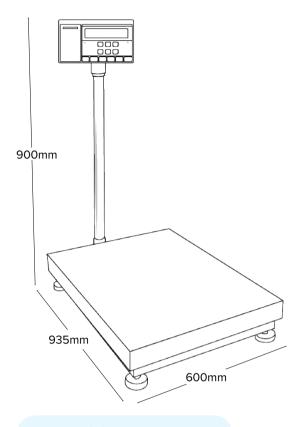



BKT Bench Scale



BKT 600 Floor Scale

BKT Bench Scale BKT 75, BKT 150, BKT 300

Model	Capacity	Readability	Pan Size	Net Weight
BKT 8	8kg	0.1g	400x300mm	8.5kg
BKT 16	16kg	0.5g	400x300mm	8.5kg
BKT 32	32kg	1g	400x300mm	8.5kg
BKT 60	60kg	2g	400x300mm	8.5kg
BKT 75	75kg	5g	500x400mm	13.5kg
BKT 120	120kg	5g	400x300mm	8.5kg
BKT 150	150kg	10g	500x400mm	13.5kg
BKT 300	300kg	20g	500x400mm	13.5kg
BKT 600	600kg	50g	800x600mm	26.5kg

DID YOU KNOW?




Free software is provided for the BKT, allowing users to create fully customised label designs on a PC. It's easy to use and within minutes you can have labels ready to go featuring a company logo, weight, date and more.



With a choice of sizes, capacities, readabilities and options, Adam Equipment counting scales can easily accommodate counting, check counting, filling, checkweighing and accumulation needs. They are able to quickly and accurately count parts, saving time in manufacturing applications and reducing waste when filling packs.

Simple to use, Adam's counting scales are available with a single display, or with three displays to simultaneously show unit weight, count and total weight. Adam offers dual counting scales, which maximise efficiency by allowing the use of a second auxiliary platform when counting large quantities.

GFC pg. 40

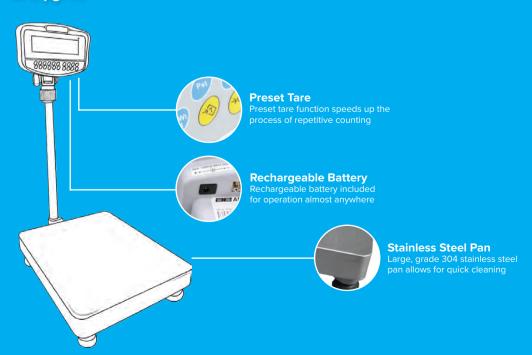

Cruiser® CCT Bench Counting Scales







ATP2 Thermal Printer

Large & Small Scoops

Cruiser CCT offers intelligent functions that are practical for shipping and receiving, warehouse use, and production facilities. Help reduce waste by using the CCT to quickly check the number of pieces in a container.



Backlit LCD displays show weight, unit weight and total count clearly



Internal counting resolution of 1:1,600,000 for precise results

Applications

Parts counting | Check counting | Weighing | Net total weighing



RS-232/optional USB interface provides connection to printers and computers


Features

- Freely selectable sample sizes
- Solid ABS housing provides durability for industrial use
- Rechargeable battery for operation almost anywhere
- Built-in memory for storing products and settings
- · Parts counting optimisation automatically refines piece weight
- · Preset tare function speeds the process of repetitive weighing

Model	Capacity	Readability	Pan Size	Net Weight	
CCT 4	4kg	0.1g	300x210mm	3.3kg	
CCT 8	8kg	0.2g	300x210mm	3.3kg	
CCT 16	16kg	0.5g	300x210mm	3.3kg	
CCT 32	32kg	1g	300x210mm	3.3kg	
CCT 48	48kg	2g	300x210mm	3.3kg	
CCT 8UH	8kg	0.05g	300x210mm	3.3kg	
CCT 16UH	16kg	0.1g	300x210mm	3.3kg	
CCT 32UH	32kg	0.2g	300x210mm	3.3kg	
CCT 48UH	48kg	0.5g	300x210mm	3.3kg	

General Specifications

- · Weighing units: g, kg, lb
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 100 hours
- Display: Backlit LCD with 15mm-high digits
- · Calibration: External
- · Housing: ABS Plastic
- Operating temperature: -10° to 40°C







Models ending in:
UH: Ultra-high readability model













GBC and GFC parts-counting bench and floor scales offer a combination of features and durability, making them well-suited for demanding industrial counting tasks. A numeric keypad simplifies unit weight and sample entry, while the display shows total weight, unit weight and number of pieces. With its larger capacities and base size, the GFC can be used for counting and weighing large items or greater quantities of small items.

Applications

Parts counting | Check counting | Weighing



Backlit LCD shows weight, unit weight and count in one convenient location





Internal counting resolution of 1:600,000 for precise results





RS-232 interface provides speedy connection to computers and printers

Features

- · Large, grade 304 stainless steel pan allows for easy cleaning
- Splash-proof housing, keypad and display are easy to clean
- Rechargeable battery included for operation almost anywhere
- Audible overload alarm warns when capacity is exceeded
- User can program alarm to sound when preset total is reached
- · Parts counting optimisation automatically refines piece weight as parts are added
- · Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Selectable digital filtering helps minimise effects of vibration and disturbances
- Auto-zeroing ensures the screen returns to zero
- Freely selectable sample sizes

- · Weighing units: kg, lb
- Interface: RS-232, Optional USB
- Power supply: Mains power cord, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 20mm-high digits
- Calibration: External
- · Housing: ABS Plastic indicator with mild steel base
- Operating temperature: -10° to 40°C




















ATP2 Thermal Printer See pg. 80

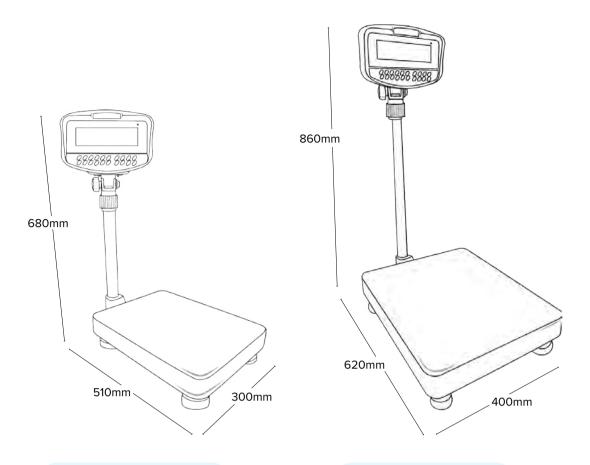

GBC Bench Scale

GFC Floor Scale

Model	Capacity	Readability	Pan Size	Net Weight
GBC 16	16kg	0.5g	400x300mm	7.6kg
GBC 32	32kg	1g	400x300mm	7.6kg
GBC 60	60kg	2g	400x300mm	7.6kg
GFC 75	75kg	5g	500x400mm	12.5kg
GFC 150	150kg	10g	500x400mm	12.5kg
GFC 300	300kg	20g	500x400mm	12.5kg

DID YOU KNOW?



The full numeric keypad on the GBC/GFC indicators allows sample weights, if already known, to be entered by hand. It also allows counting limits to be entered, if using the check counting function.

BCT scales offer excellent value for bulk industrial counting tasks. A built-in printer outputs labels that feature weight, parts counts, QR codes, barcodes and more. Store up to 1006 PLUs or piece weights to expedite inventory and batching jobs.





BCT Bench Scale

BCT without Pillar

Applications

Weighing | Parts counting | Check counting | Averaging | Barcode/Label printing



Grade 304 stainless steel pan stands up to industrial use



Internal counting resolution of 1:600,000 for precise results



QR codes, barcodes and more

Features

- · Backlit LCD shows weight, unit weight and count in one location
- RS-232 interface provides speedy connection to computers and printers
- Splash-proof housing, keypad and display are easy to clean
- · Rechargeable battery included for operation almost anywhere
- Audible overload alarm warns when capacity is exceeded
- User can programme alarm to sound when preset total is reached
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- · Selectable digital filtering helps minimise effects of vibration and disturbances

- Weighing units: g, kg, lb, oz
- Interface: RS-232
- Power supply: 12VDC 3A adapter, 10Ah Internal rechargeable battery
- Battery life (up to): 110 hours
- Display: Backlit LCD with 22mm-high digits (15mm Unit weight and Count)
- Calibration: External
- Housing: ABS Plastic indicator with mild steel base
- Standard label size (WxH): 50x30mm (labels up to 60mm height can be used)
- · Operating temperature: -10° to 40°C



















Labels See pg. 77

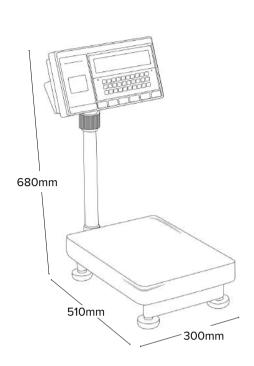

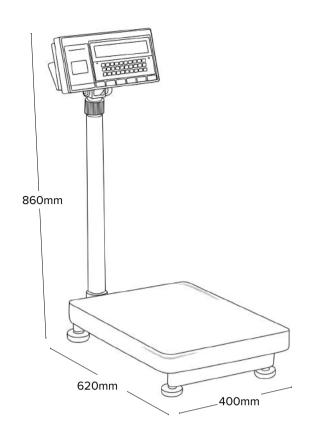

BCT Bench Scale

BCT Floor Scale

Model	Capacity	Readability	Pan Size	Net Weight
BCT 16	16kg	0.5g	400x300mm	8.5kg
BCT 32	30kg	1g	400x300mm	8.5kg
BCT 60	60kg	2g	400x300mm	8.5kg
BCT 75	75kg	5g	500x400mm	13.5kg
BCT 150	150kg	10g	500x400mm	13.5kg
BCT 300	300kg	20g	500x400mm	13.5kg



Adam Equipment offers a broad selection of durable, IP-rated washdown scales for all types of weighing tasks. All washdown scales can be thoroughly hosed down or washed with a pressure washer, as they incorporate stainless steel parts and watertight seals.

Ideal for use in many industries, Adam washdown scales are well-suited for weighing food and

beverages, powders, chemicals, pharmaceuticals, or for any application needing a sealed scale for wet or dusty environments. This allows for removal of any residual particles after weighing, which minimises the possibility of cross-contamination, removes dirt build-up and helps eliminate the growth of bacteria, mould or other toxins.

Model Quick Finder

	ABW	ABW-S	Gladiator
IP67 rated	•		
IP68 rated		•	•
Sealed keypad	•	•	•
Stainless steel weighing pan	•	•	•
Checkweighing function	•	•	•
RS-232 interface			•
Front and rear displays	•	•	
Trade approved models available			•



Designed for applications needing frequent washdown, Aqua ABW scales come in a selection of capacities and readabilities. ABW offers an IP67 rating and features a stainless steel pan to withstand demanding industrial and food processing environments.



Checkweighing function indicator appears in three bright LED colours



Solid IP67-rated ABS housing is durable enough for industrial use



ABW 32 with Large Pan

Applications

Weighing | Percentage weighing | Checkweighing | Parts counting




Front and rear LED displays allow for dual use

Features

- IP67-rated housing with sealed keypad protects against water and dust
- Overload protection helps prevent damage to internal components
- Bright LED display for easy viewing in most environments
- · Rechargeable battery included for operation almost anywhere
- Clear, hidden-until-needed function indicators keep focus where it's needed
- · Stabilisation time of under one second


Model	Capacity	Readability	Pan Size	Net Weight
ABW 4	4kg	0.5g	245x180mm	2.5kg
ABW 8	8kg	1g	245x180mm	2.5kg
ABW 16	16kg	2g	245x180mm	2.5kg
ABW 32	32kg	5g	300x210mm	2.5kg







- Weighing units: kg, g, lb, oz, lb:oz
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 80 hours
- Display: 2x LED displays with 20mm front and 15mm rear digits
- · Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C



Aqua® ABW-S Stainless Steel Waterproof Scales



IP68-certified waterproof protection and tough, grade 304 stainless steel housing make the Aqua ABW-S an essential tool for weighing in washdown environments. Weighing as precise as to 0.1g means dependable results for many applications.



IP68, grade 304 stainless steel housing protects scale in washdown areas



ABW 32S with Large Pan

Applications

Weighing | Percentage weighing | Checkweighing | Parts counting



Bright LED display for easy viewing in most environments

Features

'Hidden until lit' checkweighing lights show

if weight is above, below or within limits

- IP68-rated waterproof housing with sealed keypad protects against water and dust
- Rechargeable battery included for operation almost anywhere
- Internal counting resolution 1:600,000 for precise results
- Parts counting optimisation automatically refines piece weight as parts are added
- Overload protection helps prevent damage to internal components
- · Front and rear LED displays allow for dual use
- Clear, hidden-until-needed function indicators keep focus where it's needed


- Weighing units: kg, g, lb, oz, lb:oz
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 80 hours
- Display: 2x LED displays with 20mm front and 15mm rear digits
- · Calibration: External
- · Housing: Stainless Steel
- Operating temperature: 0° to 40°C







Large & Small Scoops See pg. 81

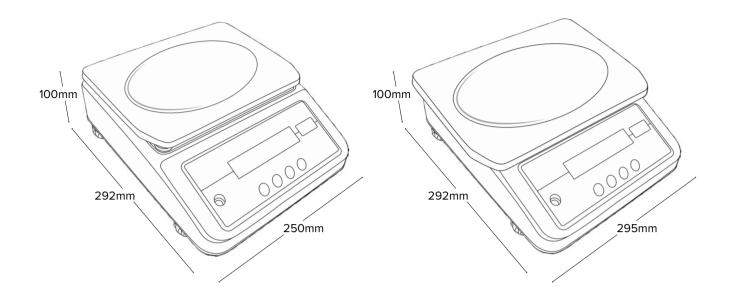

ABW-S Standard Pan

ABW32S with Larger Pan

Model	Capacity	Readability	Pan Size	Net Weight
ABW 4S	4kg	0.1g	245x180mm	2.5kg
ABW 8S	8kg	0.5g	245x180mm	2.5kg
ABW 16S	16kg	1g	245x180mm	2.5kg
ABW 32S	32kg	2g	300x210mm	2.5kg

DID YOU KNOW?



IP ratings are a grading system used to determine the level of protection from water, dust or dirt. IP ratings are assigned in accordance with British standard BS EN 60529:1992. IP68-certified scales, such as the ABW-S, are waterproof.

Gladiator scales achieve washdown weighing tasks in demanding food, pharmaceutical and industrial settings. Boasting an IP68 waterproof rating, the Gladiator features easy-to-clean stainless steel construction and a sealed indicator that is protected in dusty or wet environments.

Applications

Weighing | Percentage weighing | Checkweighing | Parts counting | Check counting | Dynamic/Animal weighing | Display hold



Water-resistant, encapsulated silicone-coated loadcell





Backlit display changes colour for quick notification of checkweighing limits



IP68-rated for protection against water and dust

Features

- Large, grade 304 stainless steel pan allows for easy cleaning
- · Rugged stainless steel construction for ultimate durability
- Sealed keypad protects against dirt and spills
- RS-232 interface provides speedy connection to computers and printers
- · Rechargeable battery included for operation almost anywhere
- · Hold function freezes the displayed weight
- Parts counting with preset sample sizes
- Preset tare function speeds the process of repetitive weighing
- Selectable digital filtering for dynamic / animal weighing enables consistent results for moving subjects

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz, N, custom unit*
- Interface: RS-232
- Power supply: Fixed mains power cord, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 40mm-high digits
- Calibration: External
- · Housing: Stainless steel
- Operating temperature: -10° to 40°C

*N, lb, oz, and lb:oz are not legal for trade weighing units




























GGS Small Platform



GGF Floor Scale



GGB Bench Scale



GGL Large Platform

Model	Capacity	Readability	Pan Size	Net Weight	
GGS 8	8kg	0.2g	250x250mm	6.8kg	
GGS 16	16kg	0.5g	250x250mm	6.8kg	
GGS 35	35kg	1g	250x250mm	6.8kg	
GGB 35	35kg	1g	400x300mm	10.4kg	
GGB 75	75kg	2g	400x300mm	10.4kg	
GGF 75	75kg	2g	500x400mm	13kg	
GGF 75H	75kg	1g	500x400mm	13kg	
GGF 150	150kg	5g	500x400mm	13kg	
GGL 150	150kg	5g	600x450mm	21kg	
GGL 300	300kg	10g	600x450mm	21kg	

Trade Approved Models M

Model	Capacity	Readability	Pan Size	Net Weight
GGS 6M	6kg	2g	250x250mm	8kg
GGS 15M	15kg	5g	250x250mm	8kg
GGS 30M	30kg	10g	250x250mm	8kg
GGB 30M	30kg	10g	400x300mm	11kg
GGB 60M	60kg	20g	400x300mm	11kg
GGF 60M	60kg	20g	500x400mm	21kg
GGF 150M	150kg	50g	600x450mm	21kg
GGL 150M	150kg	50g	600x450mm	21kg



Adam Equipment offers a range of heavy duty and robust platform scales designed with features suited to demanding weighing environments such as factories, shipping and receiving departments, warehouses and loading docks. These industrial platform scales are ideal for weighing bulky and large items such as boxes, shipping crates, pallets, heavy luggage and other oversized items.

Adam's industrial platform scales are simple and easy to use yet versatile in application. While they are often used to weigh heavy items because of their high capacities, they can also be connected

to weighing indicators for additional performance capabilities such as checkweighing, percentage weighing and counting.

A platform weighing scale can also be connected to Adam's label printers, which are ideal for helping keep track of stock and for business inventory management purposes. Some heavyduty platform scales can also be connected to ramps and rollerdecks to make loading and unloading easier.

Model Quick Finder

	AELP	PTSplus	PTT	SHS,LHS & IHS	PT	PTM	GB & GF	W Series
Stainless steel pan							•	•
Seperate indicator								•
Suitable for pallet weighing	•	•	•		•			
Handles and/or wheels for portability								
Rechargeable battery		•	•	•				
Mild-steel base								
IP68 rated								•
Zero-tracking feature								



AELP beams are a portable, durable weighing solution that can be adjusted according to the size of the object being weighed, including containers, platforms and cages. Choose the indicator option that best fits your needs!



AE 403 Waterproof Indicator



AE 503 & AE 504 Label **Printing Indicators**



GC Counting Indicator



GK-S/GK-Plus/GK-PlusM **Checkweighing Indicators**



Low profile beams for easy loading with a pallet truck



Integrated handles and wheels for added portability




Heavy duty construction for industrial use

Features

- Approximately 5-metre shielded cable
- Can be stored away easily when not in use
- Can be used with any Adam indicator
- · Two beams per set

- · Housing: Mild steel base
- Operating temperature: -10° to 40°C

Model	Capacity	Readability	Beam Size (x2)	Net Weight
AELP 1000	1000kg	0.2kg	1330×120mm	34kg
AELP 2000	2000kg	0.5kg	1330x120mm	34kg
AELP 3000	3000kg	1kg	1330x120mm	34kg
























The PTSplus pallet truck scale offers an easy way to manage, move and weigh heavy loads. Heavy-duty reinforced steel pallet forks are generously sized and provide durable lifting capabilities. A zero-radius pivoting handle offers exceptional maneuverability in tight spots.





Calibration Certificate

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Dynamic/Animal weighing



Stainless steel, IP68 waterproof indicator with large, clear LCD display



Rugged, heavy duty construction for daily industrial weighing




Backlit display changes colour for easy checkweighing

Features

- · Capacity tracker built into display for easily monitoring possible overloads
- · Splash-proof housing, keypad and display are easy to clean
- Rechargeable battery included for operation almost anywhere
- · Audible overload alarm warns when capacity is exceeded
- · Checkweighing with audible alarm
- Parts counting with preset sample sizes
- Zero-tracking feature ensures display returns to zero reading

Model	Capacity	Readability	Fork Size (x2)	Net Weight
PTSplus 2000	2000kg	0.5kg	1200x160mm	125kg

- Weighing units: kg, lb, lb:oz, oz, N
- Interface: RS-232
- · Power supply: Internal rechargeable battery; Fixed mains power cord
- Battery life (up to): 120 hours
- · Display: Backlit LCD with 40mm-high digits Calibration: External
- · Housing: Mild steel base











The PTT's large display features a built-in printer that can print barcodes, QR codes, pictures and custom logos on 50mm-wide labels. The backlight is programmable and the keys are colour-coded for quick recognition.





Labels

Applications

Weighing | Parts counting | Percentage weighing | Checkweighing | Accumulation | Display hold | Peak hold | Dynamic/Animal weighing | Barcode/Label printing



Calibration Certificate



Built-in printer – print count data, QR codes, barcodes and more



Rugged, heavy duty construction for daily industrial weighing




Suitable for use with most pallet types and sizes

Features

- Capacity tracker built into display for easily monitoring possible overloads
- Sealed keypad protects against dirt and spills
- · Rechargeable battery included for operation almost anywhere
- · Checkweighing with audible alarm
- Multilingual display allows use in many different countries
- Selectable digital filtering for dynamic / animal weighing enables consistent results for moving subjects

Model	Capacity	Readability	Fork Size (x2)	Net Weight
PTT 2000	2000kg	0.5kg	1200x160mm	125kg

- · Weighing units: kg, lb, oz
- Interface: RS-232
- Power supply: Internal rechargeable battery;
 12VDC 3A adapter
- Battery life (up to): 110 hours
- Display: Backlit LCD with 34mm-high digits
- · Calibration: External
- · Housing: Mild steel base



















With a large rotating plated steel hook and shackle with safety catch, suspended loads can be safely weighed with strength and flexibility. LHS and IHS crane scales feature die cast aluminium housing. A standard remote control allows scale operation from a safe distance.



Applications

Weighing



Rugged construction stands up to industrial use



Rotating hook allows easy access while loading, then safely locks in place during weighing



Remote control allows safe, hands-free operation

Features

- Bright LED display for easy viewing in most environments
- IHS's solid metal housing resists spills and protects internal components
- Rechargeable battery included for operation almost anywhere
- Hold function freezes the displayed weight, allowing time to elapse without losing the result
- Zero-tracking feature ensures display returns to zero reading

General Specifications

- · Weighing units: kg, lb
- Power supply: Internal rechargeable battery;

SHS: 8.4VDC 800mA adapter, 4 x AA batteries

LHS: 6VDC 600mA adapter IHS: 7.2VDC 2A adapter

- Battery life (up to); LHS: 80 hours, IHS: 110 hours
- Display:

SHS: LED with 15mm-high digits

LHS: LED with 25mm-high digits

IHS: LED with 30mm-high digits

- · Calibration: External
- · Housing:

SHS: Polycarbonate

LHS / IHS: Die-cast aluminium


• Operating temperature: 0° to 40°C









Remote included (2 x AAA batteries)

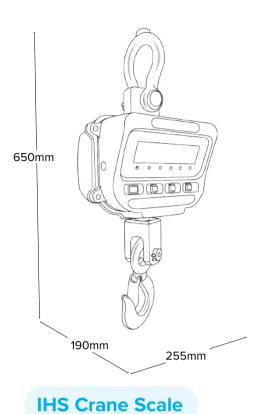




SHS Crane Scale



LHS Crane Scale

Model	Capacity	Readability	Net Weight
SHS 50	50kg	0.01kg	1.2kg
SHS 150	150kg	0.02kg	1.2kg
SHS 300	300kg	0.05kg	1.2kg
LHS 500	500kg	0.1kg	4.8kg
LHS 1500	1500kg	0.2kg	4.8kg
LHS 2000	2000kg	0.5kg	4.8kg
IHS 1	1000kg	0.2kg	12kg
IHS 3	3000kg	0.5kg	14kg
IHS 5	5000kg	1kg	19kg
IHS 10	10000kg	2kg	31kg

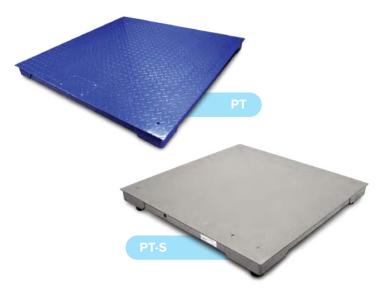

The PT and PT-S platform scale is designed to weigh pallets, crates and large containers on warehouse and factory floors. PT platforms are compatible with several Adam indicators that can be used for checkweighing, parts counting and dynamic animal weighing.



AE 403 Waterproof Indicator



AE 503 & AE 504 Label **Printing Indicators**



GC Counting Indicator



GK-S/GK-Plus/GK-PlusM **Checkweighing Indicators**



Reinforced construction suitable for demanding industrial use



Attachable eye hooks for easy transportation



Tough, checkered plate surface for added grip (PT models)

PT Features

- · Rugged construction stands up to industrial use
- Optional ramps facilitate loading and unloading
- Can be used with any Adam indicators
- Approximately 5-metre shielded cable


General Specifications

- Weighing units: kg, lb, lb:oz, oz, N*
- · Housing: Mild steel base
- Operating temperature: -10° to 40°C

*Not all weighing units available on all indicator setups

PT-S Features

- · Rugged construction stands up to industrial use
- · IP66-rated protection against water and dust
- Can be used with any Adam indicators
- Approximately 3-metre shielded cable



Steel Ramps See pg. 81









*All features listed here are indicator-dependent












Indicator Stand See pg. 78

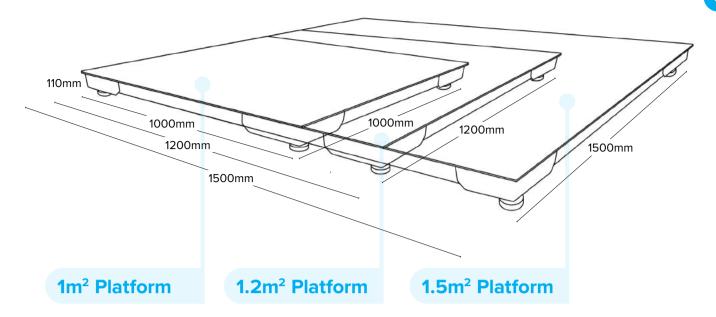

Model	Capacity	Readability	Pan Size	Net Weight
PT 110	1000kg	0.2kg	1000x1000mm	62kg
PT 310	3000kg	0.5kg	1000×1000mm	62kg
PT 112	1000kg	0.2kg	1200x1200mm	79kg
PT 312	3000kg	0.5kg	1200x1200mm	79kg
PT 115	1000kg	0.2kg	1500x1500mm	111kg
PT 315	3000kg	0.5kg	1500x1500mm	111kg
PT 110S	1000kg	0.2kg	1000x1000mm	62kg
PT 310-5S	3000kg	0.5kg	1000x1000mm	62kg
PT 310-10S	4500kg	1kg	1000x1000mm	62kg
PT 112S	1000kg	0.2kg	1200x1200mm	79kg
PT 312-5S	3000kg	0.5kg	1200x1200mm	79kg
PT 312-10S	4500kg	1kg	1200x1200mm	79kg
PT 115S	1000kg	0.2kg	1500x1500mm	111kg
PT 315-5S	3000kg	0.5kg	1500x1500mm	111kg
PT 315-10S	4500kg	1kg	1500x1500mm	111kg

PT Platforms with Indicators

Model	Capacity	Readability	Pan Size	Net Weight
PT 110	1000kg	0.2kg	1000x1000mm	64kg
PT 310	3000kg	0.5kg	1000x1000mm	64kg
PT 112	1000kg	0.2kg	1200x1200mm	81kg
PT 312	3000kg	0.5kg	1200x1200mm	81kg
PT 115	1000kg	0.2kg	1500x1500mm	113kg
PT 315	3000kg	0.5kg	1500x1500mm	113kg
PT 110S	1000kg	0.2kg	1000x1000mm	64kg
PT 310-5S	3000kg	0.5kg	1000x1000mm	64kg
PT 310-10S	4500kg	1kg	1000x1000mm	64kg
PT 112S	1000kg	0.2kg	1200x1200mm	81kg
PT 312-5S	3000kg	0.5kg	1200x1200mm	81kg
PT 312-10S	4500kg	1kg	1200x1200mm	81kg
PT 115S	1000kg	0.2kg	1500x1500mm	113kg
PT 315-5S	3000kg	0.5kg	1500x1500mm	113kg
PT 315-10S	4500kg	1kg	1500x1500mm	113kg



The PTM low-profile platform is ideal for weighing wheelchairs, barrels and oversized containers. Ramps on both sides offer smooth transitions between the floor and the weighing platform, while handles and wheels allow easy mobility.



AE 403 Waterproof Indicator



AE 503 & AE 504 Label **Printing Indicators**




GC Counting Indicator




GK-S/GK-Plus/GK-PlusM **Checkweighing Indicators**



Integrated handles and wheels for transportation



Built-in ramps on either side make access easier



Tough, chequer plate surface for added grip

Features


- · Heavy-duty rubber feet ensure stability of unit
- Adjustable levelling feet help optimise setup
- Approximately 3-metre load cell cable
- Rugged construction stands up to industrial use

General Specifications


- Weighing units: kg, lb, lb:oz, oz, N*
- · Housing: Mild steel base
- Operating temperature: -10° to 40°C

*Not all weighing units available on all indicator setups

Model	Capacity	Readability	Pan Size	Net Weight
PTM 500	500kg	0.1kg	760x580mm	35.5kg

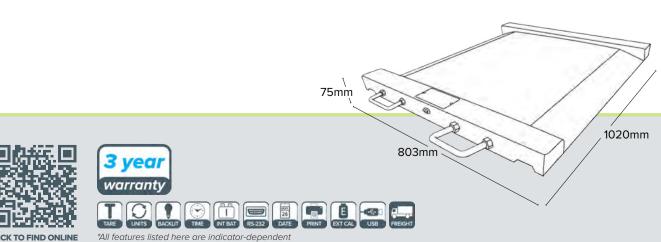







GB Platform

Featuring a removable stainless steel pan, GB platform scales offer a durable solution for industrial applications such as weighing, parts counting, percentage weighing and comparative weighing.



Rugged build quality stands up to industrial use



Durable stainless steel pan; overload protection



Can also be used as a second platform


Features

- Can be used with any Adam indicator
- · Overload protection helps prevent damage
- Large, grade 304 stainless steel pan allows for easy cleaning

Model	Capacity	Readability	Pan Size	Net Weight
GB 8	8kg	0.1g	400x300mm	8kg
GB 16	16kg	0.2g	400x300mm	8kg
GB 32	32kg	1g	400x300mm	8kg
GB 60	60kg	2g	400x300mm	8kg
GB 120	120kg	5g	400x300mm	8kg
GF 75	75kg	5g	500x400mm	10kg
GF 150	150kg	10g	500x400mm	10kg
GF 300	300kg	20g	500x400mm	10kg
GF 600	600kg	50g	800x600mm	23kg

General Specifications

- · Calibration: External
- · Housing: Mild steel base
- Operating temperature: -10° to 40°C










*Minimum height with feet wound up










WB



WF



WL



Rugged stainless steel construction for ultimate durability



IP68-rated for protection against water and dust



Can also be used as a second platform

Features

- Large, grade 304 stainless steel pan allows for easy cleaning
- · IP68-rated for protection against water and dust
- Overload protection helps prevent damage to internal components

- Housing: Stainless steel
- Operating temperature: -10° to 40°C



















WS 8, 16 & 32 Models

WB 35 & WB 75 Models






WF 75 & WF 150 Models

WL 150 & WL 300 Models

Model	Capacity	Readability	Pan Size	Net Weight
WS 8	8kg	0.5g	250x250mm	4kg
WS 16	16kg	1g	250x250mm	4kg
WS 32	32kg	2g	250x250mm	4kg
WB 35	35kg	2g	400x300mm	7.7kg
WB 75	75kg	5g	400x300mm	7.7kg
WF 75	75kg	5g	500x400mm	10.5kg
WF 150	150kg	10g	500x400mm	10.5kg
WL 150	150kg	10g	600x450mm	16.8kg
WL 300	300kg	20g	600x450mm	16.8kg

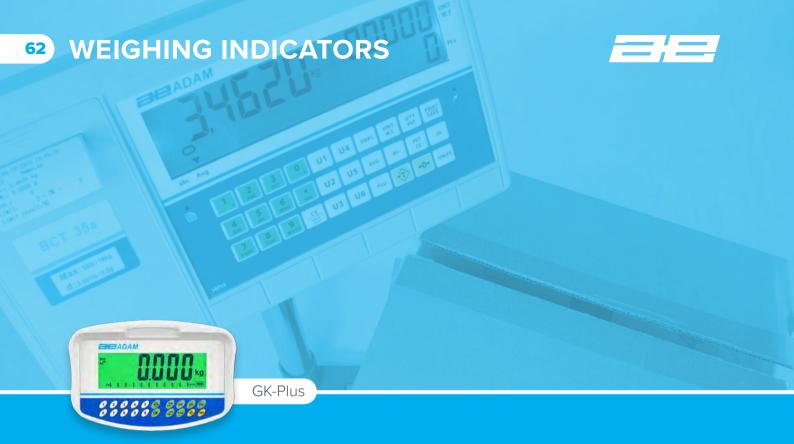

Flexible and affordable, Adam Equipment's weighing scale indicators are well-suited for use in warehouses, production lines, shipping and receiving departments, and during packaging, processing and inventory control jobs. From basic models to IP68-rated washdown versions, Adam's indicators deliver the durability and versatility needed to perform weighing and counting tasks.

Adam indicators can be configured with a number of platforms, allowing users to combine the features, functions, readability and capacity to suit their needs. Adam indicators provide a wide range of features, including large displays, numeric keypads and coloured LEDs to simplify weighing, checkweighing and counting tasks.





A rugged stainless steel design and IP68 rating make AE 403 the right choice for a variety of industrial applications. The backlit display shows results in 40mm-high digits and changes colour when the weight is over, under or within limits.



Applications

Parts counting | Percentage weighing | Display hold | Checkweighing | Accumulation | Peak hold | Net/Gross | Dynamic/Animal weighing



IP68 waterproof stainless steel housing



RS-232 interface provides speedy connection to computers and printers



Colour-changing backlight for easier checkweighing

Features

- · IP68-rated for protection against water and dust
- Capacity tracker built into display
- Wall-mount bracket provided
- Checkweighing with audible alarm
- Selectable digital filtering
- User-selectable scale division
- Rechargeable battery for operation almost anywhere

Model	Capacity	Readability	Net Weight
AE 403	Selectable	80,000 divisions	2kg


Trade Approved Models M

Model	Capacity	Readability	Net Weight
AE 403M	Selectable	6,000 divisions	2kg

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz, N, custom unit*
- Interface: RS-232
- · Power supply: Fixed mains power cord, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 40mm-high digits
- Calibration: External
- Housing: Stainless steel
- Operating temperature: 0° to 40°C

*lb, oz, and lb:oz are not legal for trade weighing units

























The AE 503 and AE 504 label printing indicators combine weighing applications and a printer in one easy-to-use device, providing an ideal solution for manufacturing, packing and distribution needs.



Print weight, QR codes, barcodes and customised labels in several languages



AE 503

Applications

Weighing | Parts counting | Check counting | Averaging | Barcode/Label printing | Checkweighing | Accumulation | Dynamic/Animal weighing (AE 503) | Percentage weighing (AE 503) | Peak hold (AE 503)



AE 504 numeric keypad allows selection from 1006 PLUs

Features

- · Rechargeable battery included for operation almost anywhere
- · Parts counting optimisation automatically refines piece weight as parts are added
- Checkweighing with audible alarm
- User-selectable scale division

Vivid backlit LCD display easily

visible in any lighting conditions

Quick and easy configuration using the keypad

Model	Capacity	Readability	Net Weight
AE 503	Selectable	80,000 divisions	2.8kg
AE 504	Selectable	80,000 divisions	2.8kg

General Specifications

· Weighing units:

AE503: g, kg, lb, oz, ct, dr, mm, T, tonne

AE504: g, kg, lb, oz

· Interface: RS-232

Power supply: 12VDC 3A adapter, Internal rechargeable battery

• Battery life (up to): 110 hours

Display:

AE503: Backlit LCD with 34mm-high digits


AE504: 22mm-high digits

Calibration: External Housing: ABS Plastic

Standard label size (WxH): 50x30mm











With a wide range of features, the GC counting indicator is ideal for parts counting tasks. Its numeric keypad facilitates unit weight and sample entry, while the display shows unit weight, total weight and number of pieces.

RS-232 interface for sending data to PCs and printers



Piece weight, total weight and piece count clearly visible in one place

Applications

Weighing | Parts counting | Check counting




Splash-proof housing, keypad and display are easy to clean

Features

- Vivid, backlit LCD easily visible in any lighting conditions
- · Capacity tracker built into display
- Solid ABS housing provides durability for industrial use
- Wall-mount bracket for placing indicator on vertical surface
- Internal counting resolution of 1:600,000 for precise results
- Parts counting with freely selectable sample sizes
- Selectable digital filtering
- · Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- · Programmable capacity and readability

Model	Capacity	Readability	Net Weight
GC	Selectable	60,000 divisions	2kg

- · Weighing units: g, kg, lb
- · Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 20mm-high digits
- Calibration: External
- · Housing: ABS plastic
- Operating temperature: -10° to 40°C




















For easier checkweighing, choose our GK indicators. Feature-rich and easy to use, these standard and trade approved indicators have checkweighing red/amber/green lights with audible alarm, plus full numeric keypad to enter checkweighing limits.





GK-S



GK-PlusM



Weighing | Parts counting | Check counting | Check weighing | Percentage weighing | Total net weight (GK-Plus) | Dynamic/Animal weighing (GK-Plus)



Simple, 5-button keypad layout for quick and easy weighing tasks



Full numeric keypad for easier checkweighing



Trade approved for applications where weight determines price

Common Features

- Capacity tracker built into display
- Solid ABS housing provides durability for industrial use
- Splash-proof housing, keypad and display are easy to clean
- Quick and easy configuration using the full numeric keypad
- Wall-mount bracket for placing indicator on vertical surface
- Parts counting optimisation automatically refines piece weight as parts are added
- Selectable digital filtering
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Programmable capacity and readability
- 1:1,600,000 internal counting resolution for precise results (GK-S and GK-Plus)

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz, N*
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery (optional extra on Standard models)
- Battery life (up to): 120 hours
- Display: Backlit LCD with 40mm-high digits
- Calibration: External
- · Housing: ABS plastic
- Operating temperature: -10° to 40°C

*lb, oz, and lb:oz are not legal for trade weighing units




























GK-S Indicator

GK-Plus & GK-PlusM Indicator

Model	Capacity	Readability	Net Weight
GK-S	Selectable	80,000 divisions	2kg

Model Capacity		Readability	Net Weight	
GK-Plus	Selectable	80,000 divisions	2kg	

Trade Approved Models M

Model	Capacity	Readability	Net Weight
GK-PlusM	Selectable	6,000 divisions	2kg

SHEADAM Kg

DID YOU KNOW?

Our industry-leading warranties, introduced in 2023, mean greater peace of mind when buying Adam products. Our GK-PlusM, and brand new GK-Plus and GK-S indicators all come with a 5 year warranty.



Adam Equipment offers a full line of scales and balances for health and fitness applications. With rugged construction, easy operation and practical features, our balances and scales can be found in nursing homes, rehab centres, spas, schools, fitness facilities, gyms and veterinary practices.

Easy to use, Adam's health and fitness scales are suitable for a variety of tasks, including weighing,

body mass index (BMI) calculation, ultrasonic and mechanical height assessment, blood bag measurement, food portioning for weight control, and measuring ingredients for herbal tonics, tinctures, bulk compounds and nutritional supplements.

MDW pg. 70





Versatile and portable, the MTB offers excellent value for tasks such as weighing infants, toddlers or small animals. A cleverly designed ergonomic cradle – which provides comfortable support for babies and locks securely in place – removes easily to reveal a non-slip rubber mat underneath, simplifying the task of weighing toddlers or small animals.



MTB without Cradle

ApplicationsWeighing



Removable cradle to reveal non-slip base underneath



Lightweight design for added portability




Ergonomic cradle for comfort and support

Features

- Simple operation allows quick startup
- High-contrast display is easily visible from a distance
- Remove blanket weight using tare function
- Operates with AC adaptor (included) or batteries (not included)

Model	Capacity	Readability	Pan Size	Net Weight
MTB 20	20kg	0.005kg	560x285mm	3.2kg

- Weighing units: kg, lb, lb:oz
- Power supply: 6VDC 500mA adapter, 4 x AA batteries
- Display: LCD with 29mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 10° to 40°C







With a modern, robust design, MDW digital scales offer affordable precision for healthcare and fitness facilities. The MDW provides precise height, weight and BMI measurement, and features a rugged metal base with non-slip weighing platform.

Applications

Weighing | Display hold | Height measurement





Calibration Certificate



ATP2 Thermal Printer



Weight readings are bright and clear on the LED display



Compact, solid, anti-slip platform



Height rod helps with BMI calculation

General Specifications

- · Weighing units: kg, lb
- · Display: LED with 22mm-high digits
- · Calibration: External
- Operating temperature: 5° to 40°C
- Power supply: 12VDC 500mA adapter, Internal rechargeable battery
- Battery life (up to): 50 hours
- Interface: RS-232


Features

- Metal construction for base and pillar
- Integrated wheels allows for easy transport
- Body Mass Index (BMI) calculation

Model	Capacity	Readability	Pan Size	Height Rod Max	Net Weight
MDW 300L	300kg	0.05kg	375x275mm	2120mm	13kg







The elegant MUW ultrasonic scale calculates height, weight and BMI, with results displayed on the backlit LCD. This scale simplifies data collection and outputs user identification information without breaching confidentiality.



Calibration Certificate



ATP2 Thermal Printer

Applications

Weighing | Display hold | Height measurement



Vivid, backlit LCD easily visible in any lighting conditions



Ultrasonic height measurements from 80cm-210cm



Anti-slip platform ensures safety when stepping on and off the scale

General Specifications

- · Weighing units: kg, lb, lb:oz
- Display: Backlit LCD with 17mm-high digits
- Calibration: External
- Operating temperature: 0° to 40°C
- Power supply: 12VDC 800mA adaptor, Internal rechargeable battery
- Battery life (up to): 50 hours
- Interface: RS-232

Features


- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Integrated wheels allows for easy transport
- Body Mass Index (BMI) calculation
- Rechargeable battery included for operation almost anywhere

2320mm

Model	Capacity	Readability	Pan Size	Net Weight
MUW 300L	300kg	0.05kg	375x375mm	21.7kg









Adam Equipment's weighing accessories can provide added protection for your weighing scale or balance, and also can increase performance and boost efficiency.

Certain industries require adherence to a particular set of practices or standards; printers, weighing pans and other helpful tools are available to ensure accurate readings and best practices. GLP guidelines are easy to follow using Adam printers and data collection software. To simplify data collection, AdamDU software enables

users to capture data from any Adam Equipment balance having an RS-232 or USB interface.

Adam offers several accessory kits that can simplify certain applications. Combined with our precision or analytical balances, Adam's density kit makes density determination easy and precise. A temperature calibration kit for our PMB Moisture Analyser can help maintain proper settings of the temperature sensor and heating element.



OIML Calibration Weights



Adam's OIML weight sets are available in several classes. E1 and E2 weights offer superb accuracy for calibrating analytical and precision balances. F1 weights are suitable for calibrating precision balances. M1 weights are excellent for calibrating compact balances, industrial scales and general weighing equipment.





E1 Weight Set

E2 Weight Set






M1 Cast Iron Weight

M1 Weight Set



Choose complete weight sets or single weights



Ensure that your scale or balance provides accurate results



All weights meet requirements for testing to OIML standards

Calibration Certificates

UKAS or in-house Calibration Certificate per weight (Class F1 & M1)
UKAS Calibration Certificate for E2 weights (per weight)
UKAS Calibration Certificate for E2 1mg - 200g weight set
UKAS Calibration Certificate for E2 1g - 200g weight set
UKAS or in-house Calibration Certificate for F1 1mg - 200g weight set
UKAS or in-house Calibration Certificate for F1 1mg - 500g weight set
UKAS or in-house Calibration Certificate for F1 1g - 100g weight set
UKAS or in-house Calibration Certificate for F1 1g - 200g weight set

UKAS or in-house Calibration Certificate for F11g - 500g weight set UKAS or in-house Calibration Certificate for F11g - 2kg weight set UKAS or in-house Calibration Certificate for M11g - 100g weight set UKAS or in-house Calibration Certificate for M11g - 200g weight set UKAS or in-house Calibration Certificate for M11g - 500g weight set UKAS or in-house Calibration Certificate for M11g - 2kg weight set UKAS Calibration Certificate for M1 cast iron weights (per weight)






Weight Sets

Part Number	Class	Weight
700100419	OIML E1	1mg-50g
700100420	OIML E1	1mg-100g
700100421	OIML E1	1mg-200g
700100026	OIML E2	1mg-200g
700100207	OIML E2	1g-200g
700100028	OIML F1	1mg-200g
700100011	OIML F1	1mg-500g
700100027	OIML F1	1g-100g
700100049	OIML F1	1g-200g
700100042	OIML F1	1g-500g
700100070	OIML F1	1g-2kg
700100035	OIML M1	1g-100g
700100037	OIML M1	1g-200g
700100228	OIML M1	1g-500g
700100071	OIML M1	1g-2kg


Class M1



Steel Chrome



Class E1



Class E2



Part Number	Class	Weight
700100232	OIML E2	50g
700100022	OIML E2	100g
700100023	OIML E2	200g

Class F1



Part Number	Class	Weight
700100019	OIML F1	1g
700100018	OIML F1	2g
700100017	OIML F1	5g
700100016	OIML F1	10g
700100015	OIML F1	20g
700100014	OIML F1	50g
700100007	OIML F1	100g
700100012	OIML F1	200g
700100008	OIML F1	500g
700100009	OIML F1	1kg
700100010	OIML F1	2kg
700100013	OIML F1	5kg

Class M1 Cast Iron



Part Number	Class	Weight
700100183	OIML M1	5kg
700100182	OIML M1	10kg
700100181	OIML M1	20kg

Calibration Weight Tolerances



These are the maximum permissible errors for OIML weights as supplied by Adam. During calibration of mass standards and weights, the measurement uncertainty for coverage factor k=2 shall not be greater than one third of maximum permissible error value specified for a particular mass standard of weight of a given class or nominal value.

Weight	Class E1	Class E2	Class F1	Class F2	Class M1
	mg	mg	mg	mg	mg
5000kg			250,000	80,000	250,000
2000kg			10,000	30,000	100,000
1000kg		1,600	5,000	16,000	50,000
500kg		800	2,500	8,000	25,000
200kg		300	1,000	3,000	10,000
100kg		160	500	1,600	5,000
50kg	25	80	250	800	2,500
20kg	10	30	100	300	1,000
10kg	5	16	50	160	500
5kg	2.5	8	25	80	250
2kg	1	3	10	30	100
1kg	0.5	1.6	5	16	50
500g	0.25	0.8	2.5	8	25
200g	0.1	0.3	1	3	10
100g	0.05	0.16	0.5	1.6	5
50g	0.03	0.1	0.3	1	3
20g	0.025	0.08	0.25	0.8	2.5
10g	0.02	0.06	0.2	0.6	2
5g	0.016	0.05	0.16	0.5	1.6
2g	0.012	0.04	0.12	0.4	1.2
1g	0.01	0.03	0.1	0.3	1
500mg	0.008	0.025	0.08	0.25	0.8
200mg	0.006	0.02	0.06	0.2	0.6
100mg	0.005	0.016	0.05	0.16	0.5
50mg	0.004	0.012	0.04	0.12	0.4
20mg	0.003	0.01	0.03	0.1	0.3
10mg	0.003	0.008	0.025	0.08	0.25
5mg	0.003	0.006	0.02	0.06	0.2
2mg	0.003	0.006	0.02	0.06	0.2
1mg	0.003	0.006	0.02	0.06	0.2

Dark Norschau	Description	Equinox EAB/EPB/ETB	Solis SAB/SPB/STB	Luna LAB/LPB/LTB/LBB	LunaLBL	Core® CQT	Highland® HCB	CBX	CB	Dune [®] DCT	ТВВ	PMB
Part Number	Description					0		0	0	9	-	
104008036	Anti-Vibration Table	•	•	•	•		•					•
1060014262	Density Determination Kit (Equinox/Solis)	•	•									
1060015357	Density Determination Kit (Luna)			•								
3012014259	In-use Cover (ETB/STB/LTB/LBB)	•	•	•								
3012014260	In-use Cover (EAB/EPB/SAB/SPB/LAB/LPB)	•	•	•								
3012013012	In-use Cover (Luna)				•							
308232030	In-use Cover (HCB)						•					
308232033	In-use Cover (CQT)					•						
700230015	In-use Cover (CB)								•			
301208188	In-use Cover (PMB)											•
308002042	Hard Carrying Case with lock (HCB/CQT)					•	•					
700100211	Hard Carrying Case with lock (TBB)										•	
2010012712	Rechargeable Battery Pack				•							
700100410	ABI-1 loniser	•	•	•								
1120015779	ATP2 Thermal Printer	•	•	•	•		•					•
3074010266	RS-232 Cable						•					•
3014011014	RS-232 Cable M-F	•	•	•	•							
3074010267	USB Cable	•			•		•					•
3014016217	USB A-A Cable			•								
700400120	6VDC 200mA Adapter								•			
3070013622	Glass Fibre Pads (x200)											•
1070010636	Temperature Calibration Kit											•
307140001	Sample Pans (x250)											•
600002028	AdamDU Data Collection Programme	•	•	•	•		•					•
3021210953	Weigh-below Hook (Solis/Luna)		•	•								
302126013	Weigh-below Hook (Luna)				•							
3021210953	Weigh-below Hook (TBB)										•	
700100225	Weight Set (TBB)										•	
700100213	Tripod Legs (TBB)										•	
700100046	Security Lock & Cable	•	•	•	•	•	•				•	•
700660290	Calibration Certificate	•	•	•	•	•	•	•	•	•	•	•
700100035	OIML M11g - 100g Calibration Weight Set					•		•	•	•		
700100071	OIML M11g - 2kg Calibration Weight Set					•						
700100012	OIML F1 200g Calibration Weight					•						
700100072	OIML M1 200g Calibration Weight					•						
700100060	OIML M1 500g Calibration Weight					•			•			
700100029	OIML M1 1kg Calibration Weight					•			•			
700100030	OIML M1 2kg Calibration Weight					•			•			
700100398	OIML E1 5g Calibration Weight	•	•	•								
700100399	OIML E110g Calibration Weight	•	•	•								
700100400	OIML E1 20g Calibration Weight		•									
700100401	OIML E1 50g Calibration Weight	•	•	•								•
700100022	OIML E2 100g Calibration Weight	•	•	•								•
700100023	OIML E2 200g Calibration Weight	•	•	•								

Part Number	Description	Latitude LBX	Cruiser® CKT	CPWplus	GBK & GFK	AGB & AGF	ВКТ
3022014061	In-use Cover (Latitude)	•					
3022013911	In-use Cover (Cruiser)		•				
3052010526	In-use Cover (GBK/GFK)				•		
3002014371	Hard Carrying Case with lock (Latitude)	•					
302013912	Hard Carrying Case with lock (Cruiser)		•				
700100099	Hard Carrying Case with lock (CPWplus standard)			•			
303149759	Large Scoop (with fitting to scales)	•	•				
303149760	Small Scoop (with fitting to scales)	•	•				
1120015779	ATP2 Thermal Printer		•	•	•	•	•
1100011297	Relay Box					•	
3074010266	RS-232 Cable			•	•		•
700400103	RS-232 Cable (9 pin)					•	
3014011014	RS-232 Cable M-F		•				
3074010507	RS-232 to USB Adapter			•	•	•	•
3074010267	USB Cable		•		•		
2020013915	USB option (type B)		•				
202000001	Weigh-below Hook (factory-fitted)		•				
700200059	Non-slip Rubber Mat			•			
600002028	AdamDU Data Collection Programme		•	•	•	•	•
700660290	Calibration Certificate	•	•	•	•	•	•
700660288	Calibration Certificate for GFK 600/AGF 600/BKT 600				•	•	•
400005615	Labels (800 per roll)						•

Accessories for Counting Scales

Part Number	Description	Cruiser® CCT	GBC & GFC	ВСТ
3022013911	In-use Cover (Cruiser)	•		
3052010526	In-use Cover (GBK/GFK)		•	
302013912	Hard Carrying Case with lock (Cruiser)	•		
303149759	Large Scoop (with fitting to scales)	•		
303149760	Small Scoop (with fitting to scales)	•		
1120015779	ATP2 Thermal Printer	•	•	•
3074010266	RS-232 Cable	•	•	
3074010507	RS-232 to USB Adapter		•	•
3074010267	USB Cable	•	•	
2020013915	USB option (type B)	•	•	
600002028	AdamDU Data Collection Programme	•	•	•
700660290	Calibration Certificate	•	•	•
400005615	Labels (800 per roll)			•

Part Number	Description	Aqua® ABW	Aqua® ABW-S	Gladiator [®] GGS/GGB/GGF/GGL
3022014061	In-use Cover (ABW)	•		
3002014371	Hard Carrying Case with Lock (ABW)	•		
303149759	Large Scoop (with fitting to scales)	•	•	
303149760	Small Scoop (with fitting to scales)	•	•	
1120015779	ATP2 Thermal Printer			•
1100011297	Relay Box			•
3074010266	RS-232 Cable			•
3074010507	RS-232 to USB Adapter			•
600002028	AdamDU Data Collection Programme			•
700660290	Calibration Certificate	•	•	•

Accessories for Heavy Duty Scales

Part Number	Description	AELP	PTSplus	PTT	SHI/SHT/SHS	PT	PT-S	PTM
2050013351	Indicator Stand	•				•	•	•
700100199	Mild Steel Ramp - PT 10R 1000mm wide					•		
700100200	Mild Steel Ramp - PT 12R 1200mm wide					•		
700100201	Mild Steel Ramp - PT 15R 1500mm wide					•		
700100202	Stainless Steel Ramp - PT 10RS 1000mm wide						•	
700100203	Stainless Steel Ramp - PT 12RS 1200mm wide						•	
700100204	Stainless Steel Ramp - PT 15RS 1500mm wide						•	
700660288	Calibration Certificate				•		•	•
700660289	Calibration Certificate	•	•	•		•	•	
1120015779	ATP2 Thermal Printer	•	•			•	•	•
3074010507	RS-232 to USB Adapter	•	•	•		•	•	•
1100011297	Relay Box (for AE 403)	•				•	•	•
400005615	Labels - 800 per roll			•				
600002028	AdamDU Data Collection Programme		•	•		•	•	•

Part Number	Description	AE 403	AE 503/504	၁၅	GK-S	GK-Plus & GK-PlusM
3102014653	In-use Cover (AE 403)	•				
3052010526	In-use Cover (GC/GK/GK-Mplus)			•	•	•
2050013351	Indicator Stand	•	•	•	•	•
1120015779	ATP2 Thermal Printer	•		•	•	•
3014011014	RS-232 Cable			•	•	•
3074010507	RS-232 to USB Adapter	•	•	•	•	•
3134012936	RS232-to-9pin D Connector 1.5m (factory-fitted)	•			•	
1100011297	Relay Box	•			•	•
600002028	AdamDU Data Collection Programme	•	•	•	•	•
400005615	Labels - 800 per roll		•			
3051410045	Wall Bracket			•	•	•

Accessories for Health and Fitness Scales and Weights

Part Number	Description	MTB	MDW	MUW	OIML Weights
700660290	Calibration Certificate	•	•	•	
1120015779	ATP2 Thermal Printer		•	•	
3014011014	RS-232 Cable		•	•	
3074010507	RS-232 to USB Adapter		•	•	
700200106	Calibration Weight Tweezer - Small				•
700200105	Calibration Weight Tweezer - Large				•

AVT Anti-Vibration Table

104008036





The AVT allows balances to perform with precision despite air currents and vibrations. Adam's AVT is easy to assemble, as all the necessary tools are supplied.

- 400 x 450mm surface area
- Two-table construction reduces interference with the scratch-resistant granite slab
- · Lightweight tubular aluminium frame

A general purpose thermal roll printer, the ATP2 is ideal for use with most balances and scales. Designed to be efficient and compact, the printer occupies minimal space on a bench or tabletop.

- RS-232 (9F and 9M, 25-pin) cable included.
- 58mm paper width
- Dimensions: 114x184x90mm

Adam DU Data Collection Programme

600002028



AdamDU quickly collects information from up to eight Adam balances simultaneously, via RS-232 or USB connections. An easy-to-use interface with a main command window lets users view and manage data capture sessions.

- Include date and time with readings, and graph readings in real time
- Export readings in text, CSV, HTML or XML format, directly to Microsoft® Excel or Word

ABI-1 Ioniser

700100410



The Adam ioniser neutralises the static charge that accumulates in nonconductive materials such as plastic, glass, ceramics, paper and textiles.

- Discharge time: 9s/5cm, 13s/10cm, 100s/40cm (with fan on)
- Standard distance from sample to ion source ~5-40cm
- Ozone concentration is 0-0.05ppm 2cm from ion source
- Maximum air volume 0.06cm3/min


Density Determination Kits



These kits allow for you to determine density with your Equinox, Solis and Luna analytical or precision balance.



Find all Adam Accessories here



Mild steel ramps are a great accessory for the Adam platform scales, ensuring strength and durability. Securely connects to PT platforms for easier, safer operation.

•	PT Mild Steel 1000mm Ramp	700100199
•	PT Mild Steel 1200mm Ramp	700100200
•	PT Mild Steel 1500mm Ramp	700100201
•	PT-S Stainless Steel 1000mm Ramp	700100202
•	PT-S Stainless Steel 1200mm Ramp	700100203
	PT-S Stainless Steel 1500mm Ramp	700100204

Hard Carrying Case



This carry case allows scales to be placed inside to protect it during transportation. The hard shell case is durable and comes with a lock so that you can secure the scale in the case as needed.

•	Highland HCB / Core CQT	308002042
•	Latitude LBX	3002014371
•	Cruiser CKT/CCT/CDT	302013912
	TBB	700100211
	CPWnlus Standard	700100099

Temperature Calibration Kit

1070010636



This temperature calibration kit for the PMB Moisture Analyser can be used to help calibrate the temperature sensor. The kit comes with a case and a device to hold the sensor in the optimum position.

Large and Small Scoops



This confectionery stainless steel scoop is removable and easily washable. This durable item is ideal for food production.

Product Shipping Dimensions



Model	Shipping Dims (wxdxh)	Shipping Weight
Equinox EAB	530x530x390mm	9.4kg
Equinox EPB	420x530x390mm	8.8kg
Equinox ETB	300x530x390mm	8.5kg
Solis SABi	390x530x530mm	9.2kg
Solis SABe	390x530x530mm	8.9kg
Solis SPB	420x530x420mm	8.3kg
Solis STB	390x530x300mm	8kg
Luna LABi	390x530x530mm	8.3kg
Luna LABe	390x530x530mm	8kg
Luna LPBi	390x530x420mm	6.9kg
Luna LPBe	390x530x420mm	6.4kg
Luna LTBi	390x530x300mm	6.4kg
Luna LTBe	390x530x300mm	5.5kg
Luna LBBe	390x530x300mm	5.4kg
Luna LBL	457x508x203mm	9.6kg
Luna LBLP	457x508x203mm	11kg
Core CQT	152x356x279mm	1.8kg
Highland HCB	279x381x152mm	3.2kg
СВХ	190x310x95mm	0.7kg
СВ	203x229x76mm	0.9kg
Dune DCT	203x305x102mm	1.4kg
ТВВ	178x584x229mm	3.6kg
PMB	381x457x305mm	8.2kg
Latitude LBX	295x350x175mm	4kg
Cruiser CKT	190x370x420mm	4.5kg
CPWplus	102x483x381mm	5kg
CPWplus P	356x508x406mm	7.3kg
CPWplus M	127x584x559mm	10.4kg
CPWplus L	102x1092x660mm	16.3kg
GBK	780x400x160mm	9kg
GFK	460x895x210mm	18.1kg
GFK 600	660x1168x203mm	34.9kg
AGB	780x400x160mm	14kg
AGF	205x870x476mm	18kg
AGF 600	210x1286x661mm	35kg
BKT Bench Scale	425x805x170mm	14kg
BKT Floor Scale	476x870x205mm	18kg
BKT 600	661x1286x210mm	35kg
Cruiser CCT	420x370x190mm	4.5kg
GBC	780x400x160mm	9kg
GFC	460x895x210mm	18kg
BCT Bench Scale	425x805x170mm	14kg

Model	Shipping Dims (wxdxh)	Shipping Weight	
BCT Floor Scale	476x870x205mm	18kg	
Aqua ABW	295x350x175mm	4kg	
Aqua ABW-S	295x350x175mm	4kg	
Gladiator GGS	310x620x180mm	8.8kg	
Gladiator GGB	350x750x100mm	12.5kg	
Gladiator GGF	510x880x210mm	14.7kg	
Gladiator GGL	510x880x210mm	21.1kg	
AELP	127×1499×127mm	36.5kg	
PTSplus	762x1702x686mm	145.2kg	
PTT	762x1702x686mm	145.2kg	
SHS	210x320x130mm	2kg	
LHS	356x457x178mm	6kg	
IHS 1	406x483x279mm	14kg	
IHS 3	406x483x279mm	16kg	
IHS 5	406x483x279mm	20kg	
IHS 10	406x483x279mm	32kg	
PT/PT-S 1m ²	1041x1041x254mm	65kg	
PT/PT-S 1.2m ²	1219x1219x254mm	85kg	
PT/PT-S 1.5m ²	1549x1549x254mm	110kg	
PT/PT-S 1m ² [w/ Indicator]	1041x1041x457mm	67kg	
PT/PT-S 1.2m ² [w/ Indicator]	1219x1219x457mm	87kg	
PT/PT-S 1.5m ² [w/ Indicator]	1549x1549x457mm	112kg	
PTM	914x1143x127mm	68kg	
GB	400x775x160mm	9kg	
GF	483x889x178mm	13kg	
GF 600	660x1168x178mm	31kg	
WS	300x610x190mm	6kg	
WB	360x740x200mm	10kg	
WF	500x880x200mm	13kg	
WF	500x880x260mm	20.5kg	
AE 403 & AE 403M	229x279x152mm	2.7kg	
AE 503 & AE 504	280x360x220mm	4kg	
GC	229x279x229mm	2.3kg	
GK-S	229x279x229mm	2.7kg	
GK-Plus	229x279x229mm	2.7kg	
GK-PlusM	229x279x229mm	2.7kg	
МТВ	381x610x178mm	4.1kg	
MDW	533x1321x152	16.8kg	
MUW	533x1321x152	25kg	
AVT	876×673×274	67kg	

PRODUCT INDEX

Capacity Selection Guide	4-6
Analytical & Precision Balances	7
Equinox Semi-Micro, Analytical and Precision Balances	8-9
Solis Semi-Micro, Analytical and Precision Balances	10-11
Luna Analytical and Precision Balances	12-13
NEW! Luna LBL Heavy Duty Precision Balances	14-15
Compact Balances	16
Core® CQT Portable Compact Balances	17
Highland® HCB Portable Precision Balances	18-19
CBX Compact Balances	20
CB Compact Balances	21
Dune® DCT Portable Compact Balances	22
TBB Triple-Beam Mechanical Balances	23
Moisture Balances	24
Moisture Balances PMB Moisture Analyser	
	25
PMB Moisture Analyser	25
PMB Moisture Analyser Bench & Floor Scales	25 26
PMB Moisture Analyser Bench & Floor Scales Latitude LBX Compact Bench Scales	25262728-29
PMB Moisture Analyser Bench & Floor Scales Latitude LBX Compact Bench Scales Cruiser® CKT Bench Checkweighing Scales	25 26 27 28-29 30-31
PMB Moisture Analyser Bench & Floor Scales Latitude LBX Compact Bench Scales Cruiser® CKT Bench Checkweighing Scales CPWplus Bench and Floor Scales	25 26 27 28-29 30-31 s32-33
PMB Moisture Analyser Bench & Floor Scales Latitude LBX Compact Bench Scales Cruiser® CKT Bench Checkweighing Scales CPWplus Bench and Floor Scales NEW! GBK & GFK Checkweighing Bench and Floor Scale	25262728-2930-31 s32-33
PMB Moisture Analyser Bench & Floor Scales Latitude LBX Compact Bench Scales Cruiser® CKT Bench Checkweighing Scales CPWplus Bench and Floor Scales NEW! GBK & GFK Checkweighing Bench and Floor Scale AGB & AGF Bench and Floor Scales	252628-2930-31 s32-3334-35
PMB Moisture Analyser	25262730-31 s32-3334-3536-3738
PMB Moisture Analyser Bench & Floor Scales Latitude LBX Compact Bench Scales Cruiser® CKT Bench Checkweighing Scales CPWplus Bench and Floor Scales NEW! GBK & GFK Checkweighing Bench and Floor Scale AGB & AGF Bench and Floor Scales BKT Label Printing Scales Counting Scales	25262728-2930-31 s32-3334-3536-3738

Waterproof & Washdown Scales	44
Aqua® ABW Washdown Scales	45
Aqua® ABW-S Waterproof Scales	46-47
Gladiator® Waterproof Scales	48-49
Heavy-Duty & Platform Scales	50
AELP Pallet Beam Scales	51
PTSplus Pallet Truck Scales	52
PTT Pallet Truck Scales	53
SHS, LHS & IHS Crane Scales	54-55
PT & PT-S Platform Scales	56-57
PTM Drum and Wheelchair Platform Scales	58
GB & GF Platform Scales	59
W Series Waterproof Platform Scales	60-61
Weighing Indicators	62
AE 403 & AE 403M Waterproof Indicators	63
AE 503 & AE 504 Label Printing Indicators	
GC Counting Indicators	65
NEW! GK-S, GK-Plus & GK-PlusM Checkweighing Indicators	66-67
Health & Fitness Scales	68
MTB Digital Scales	69
MDW Physician Scales	70
MUW Health and Fitness Scales	71
Weights & Accessories	72
OIML Calibration Weights	
Olivic Calibration Weights	/3-/5
Accessories	



Australia

70 Miguel Road, Bibra Lake 6163

Perth, WA, Australia

Phone: +61 (0) 8 6461 6236

Email: sales@adamequipment.com.au

United Kingdom

Maidstone Road, Kingston

Milton Keynes MK10 0BD, UK Phone: +44 (0)1908 274545

Email: sales@adamequipment.co.uk

Germany

Instenkamp 4

24242 Felde, Germany

Phone: +49- (0) 4340-40300-0 Email: vertrieb@aeadam.de

United States

1 Fox Hollow Road

Oxford, CT, 06478, USA

Phone: +1 (203) 790-4774

Email: sales@adameguipment.com

South Africa

7 Megawatt Road, Spartan EXT 22, Kempton Park

Johannesburg, Republic of South Africa

Phone: +27 (0)11 9749745

Email: sales@adamequipment.co.za

China

E Building, Private Industrial Park, Zhuanyang

Avenue, Wuhan Economic & Technologica

Development Zone, 430056 Wuhan, P.R.China

Phone: + 86 (27) 59420391

Email: sales@adamequipment.com.cr











www.adamequipment.asia

Nimbus®, Core®, Dune®, Highland®, Cruiser®, Aqua®, Gladiator®, ShockProtect®, HandiCal®, Adam Equipment® and the Adam Equipment logo are registered trademarks of Adam Equipment and therefore, use of these trademarks in any way is granted only with the express written permission of Adam Equipment.

Adam Equipment follows a policy of continuous improvement and reserves the right to change specification and pricing without notice. Adam Equipment's standard terms and conditions of sale apply. Errors and omissions excepted.

Microsoft Word, Microsoft Excel and Microsoft are registered trademarks of Microsoft Corporation in the United States and other countries.